



Product Guide 2025



PROCESS COOLING
SOLUTIONS



AIR CONDITIONING
SYSTEMS

Experience the
Best in **Heating & Cooling** Solutions

PSTHVAC.COM

WELCOME

Pars Sanat Tahvиеh co.

Welcome to PST HVAC Solutions

At PST, we take pride in providing the best HVAC solutions for industrial, commercial, and residential environments. With years of experience and the use of cutting-edge technology, our products are designed to deliver the best performance, efficiency, and comfort for you.

Why Choose PST?

• **Expertise and Experience:** With over 20 years in the HVAC industry, we lead the way in offering innovative and efficient solutions for our customers.

• **Superior Quality:** Our products are manufactured using the best materials and the latest technologies to ensure the highest level of quality and durability.

• **Excellent Support:** Our support team is ready to provide consultation, installation, and maintenance services, ensuring we are always by your side.

Our Products:

Residential and Commercial Chillers:

- High efficiency and optimized energy consumption
- Robust design and long lifespan
- Silent and reliable operation

Process Cooling System :

- Ideal for large and commercial buildings
- Smart systems with temperature and humidity control
- Easy installation and maintenance.

Fan Coil Units and Air Handlers:

- Suitable for residential and office environments
- Elegant and quiet design
- Precise temperature control capabilities

Our Mission:

At PST, our mission is to provide the best HVAC solutions to create comfortable, healthy, and efficient environments for all our customers. By focusing on innovation, quality, and customer satisfaction, we strive to be your top choice always.

Introduction

5 - 17

Commercial And Industrial Chillers

18 - 53

Free-Cooling Chillers

54 - 58

Roof Top Units

59 - 63

Air Handling Units (AHU)

64 - 67

Hydronic Terminals

68 - 76

CONTENTS

Standards and Certifications

Our commitment to quality, safety, and environmental responsibility is reflected in the rigorous standards and certifications we adhere to. Explore the key standards that ensure our HVAC products meet the highest levels of performance, reliability, and sustainability.



Quality Management Systems

Overview:

ISO 9001 is an internationally recognized standard for quality management systems (QMS). It ensures that our products and services consistently meet customer and regulatory requirements.

Benefits:

- Improved customer satisfaction through effective quality management
- Enhanced operational efficiency and process improvement
- Increased credibility and competitive advantage

Application:

All aspects of our manufacturing, design, and service processes are aligned with ISO 9001 standards, ensuring consistent quality and continuous improvement.



Environmental Management Systems

Overview:

ISO 14001 specifies the requirements for an effective environmental management system (EMS). It helps organizations improve their environmental performance through more efficient use of resources and reduction of waste.

Benefits:

- Reduced environmental impact and improved sustainability
- Compliance with environmental regulations
- Enhanced corporate reputation and stakeholder confidence

Application:

Our production processes, waste management, and resource utilization are designed to minimize environmental impact and comply with ISO 14001 standards.



Occupational Health and Safety Management Systems

Overview:

ISO 45001 provides a framework for managing occupational health and safety (OH&S) risks, preventing work-related injuries and illnesses, and promoting safe and healthy workplaces.

Benefits:

- Improved employee safety and well-being
- Reduced risk of accidents and incidents
- Enhanced organizational resilience and compliance with legal requirements

Application:

We implement comprehensive safety protocols and training programs to ensure a safe working environment for our employees, in line with ISO 45001 standards.

AHRI

(Air-Conditioning, Heating, and Refrigeration Institute)
Standards

Overview:

- AHRI standards are widely recognized in the HVAC industry for ensuring the performance and efficiency of heating, air conditioning, and refrigeration products.

Benefits:

- Verified product performance and energy efficiency
- Increased trust and assurance for customers and stakeholders
- Compliance with industry benchmarks and regulations

Application:

- Our HVAC products undergo rigorous testing and certification processes to meet AHRI standards, ensuring they deliver reliable performance and energy efficiency.

ASHRAE

(American Society of Heating, Refrigerating, and Air-Conditioning Engineers) Standards

Overview:

- ASHRAE standards are essential for the design and implementation of HVAC systems, ensuring they meet performance, safety, and sustainability criteria.

Benefits:

- Optimal system design and operation for energy efficiency
- Enhanced indoor air quality and occupant comfort
- Compliance with industry best practices and guidelines

Application:

- We adhere to ASHRAE standards in the design, installation, and maintenance of our HVAC systems, ensuring they provide efficient and reliable climate control solutions.

Refrigerants

Refrigerants play a crucial role in the efficiency, performance, and environmental impact of HVAC systems. Explore the different types of refrigerants we use in our chillers and understand their benefits and applications.

R-134a

Overview:

R-134a is another HFC refrigerant known for its stability and efficiency. It is a single-component refrigerant commonly used in various cooling applications.

Benefits:

- Thermal Stability: R-134a is thermally stable and does not break down under normal operating conditions, ensuring long-term performance.
- Non-Flammable: It is non-flammable and safe to use in a wide range of applications.
- Ozone-Friendly: Like R-410A, R-134a has zero ozone depletion potential, contributing to environmental sustainability.

Application:

- Suitable for medium and large chillers, automotive air conditioning, and commercial refrigeration systems.

R-134 A

Commercial and industrial chillers



R-410A

Overview:

R-410A is a hydrofluorocarbon (HFC) refrigerant that is widely used in modern HVAC systems due to its high efficiency and environmentally friendly properties. It is a blend of two HFCs, R-32 and R-125.

Benefits:

- High Efficiency:** R-410A operates at higher pressures, allowing for better heat transfer and improved energy efficiency.
- Ozone-Friendly:** R-410A has zero ozone depletion potential (ODP), making it an environmentally friendly choice.
- Widely Available:** It is commonly used in residential, commercial, and industrial HVAC systems, ensuring easy availability and support.

Application:

- Ideal for use in residential and commercial air conditioning systems, as well as in smaller chillers designed for medium-duty applications.

R-410 A

Commercial and industrial chillers



Safety Features of HVAC Systems at PST

At PST, we prioritize the safety of our HVAC systems to ensure the well-being of our customers, technicians, and the environments where our products are installed. Our commitment to safety is reflected in the rigorous design, manufacturing, and testing processes that our products undergo. Here's a detailed overview of the safety features and practices we implement to ensure the highest levels of safety for our HVAC systems.

1 Comprehensive Safety Design

Overview:

- Safety begins at the design stage:** Our engineering team integrates various safety features into the design of each HVAC system to prevent accidents and ensure reliable operation.

Key Features:

- Safety Sensors and Switches:** Our systems are equipped with various sensors and switches that monitor temperature, pressure, and airflow to prevent dangerous conditions.

Automatic Shutoff Mechanisms:

- In the event of a malfunction or abnormal condition, our HVAC systems are designed to automatically shut off to prevent damage or safety hazards.

Fire-Resistant Materials:

- We use fire-resistant materials in critical components to minimize the risk of fire and enhance the overall safety of the system.

2 Rigorous Manufacturing Standards

Overview:

- Our manufacturing processes are designed to ensure that every HVAC system meets stringent safety standards. We adhere to internationally recognized safety protocols and use high-quality materials to enhance the safety of our products.

User Safety:

- Quality Control Checks:** Throughout the manufacturing process, we conduct rigorous quality control checks to ensure that each component meets our safety standards.

Safe Assembly Procedures:

- Our assembly procedures are designed to prevent errors and ensure that each unit is built to the highest safety specifications.

Use of Certified Components:

- We source components from reputable suppliers who meet international safety standards, ensuring the reliability and safety of our HVAC systems.

3 Extensive Testing and Validation

Overview:

- Before any HVAC system leaves our factory, it undergoes extensive testing to ensure it operates safely under all expected conditions. These tests are designed to identify and mitigate potential safety risks.

Testing Procedures:

- Electrical Safety Tests:** We conduct tests to ensure that all electrical components and connections are safe and meet regulatory standards.

Pressure Tests:

- Our systems undergo pressure testing to verify the integrity of refrigerant and water circuits, preventing leaks and potential hazards.

Fire Safety Tests:

- We test our systems to ensure they comply with fire safety regulations and standards, reducing the risk of fire-related incidents.

4 Compliance with Safety Standards and Certifications

Overview:

- Compliance with international safety standards and certifications is a key aspect of our commitment to safety. Our HVAC systems meet or exceed the requirements of various regulatory bodies.

Certifications:

- UL (Underwriters Laboratories):** Our products are certified by UL, ensuring they meet stringent safety standards for electrical devices.
- CE Marking:** Our HVAC systems carry the CE marking, indicating compliance with European safety, health, and environmental protection standards.
- ISO 45001:** Our occupational health and safety management system is certified to ISO 45001, ensuring a safe working environment and product safety.

5 User and Technician Safety Features

Overview:

- We design our HVAC systems with features that protect both users and technicians during operation and maintenance.

User Safety:

- Tamper-Proof Controls:** Our systems include tamper-proof controls to prevent unauthorized access and accidental adjustments.
- Safe Operating Instructions:** We provide clear and comprehensive operating instructions to ensure safe use of our HVAC systems.

Technician Safety:

- Service Access Panels:** Our systems are designed with service access panels that allow technicians to perform maintenance and repairs safely and efficiently.

Safety Interlocks:

- These interlocks prevent the system from operating while maintenance is being performed, protecting technicians from injury.

6 Ongoing Safety Training and Support

Overview:

- We provide ongoing safety training and support to our customers and service partners to ensure the safe operation and maintenance of our HVAC systems.

- Safety Seminars:** We conduct safety seminars and workshops to keep our customers and partners informed about the latest safety practices and standards.

Training Programs:

- Installation Training:** We offer comprehensive training programs for technicians on the safe installation of our HVAC systems.
- Maintenance Training:** Our maintenance training programs teach technicians how to safely service and repair our systems, ensuring they remain in safe operating condition.

Quality of HVAC Systems at PST

At PST, we are committed to delivering HVAC systems of the highest quality. Our dedication to excellence in design, manufacturing, and customer service ensures that our products meet the rigorous demands of various applications while providing optimal performance, reliability, and efficiency. Here's a comprehensive overview of the quality aspects of our HVAC systems.

.1 Rigorous Quality Control Processes

Overview:

- Safety begins at the design stage. Our engineering team integrates various safety features into the design of ensuring the highest quality standards is central to our manufacturing process. Our quality control procedures are designed to detect and eliminate defects, ensuring that every product that leaves our facility is flawless.

Processes:

- Incoming Material Inspection: All raw materials and components undergo thorough inspection before entering production to ensure they meet our quality standards.

- In-Process Quality Checks: During production, each step is monitored with strict quality checks to ensure adherence to design specifications and standards.

Final Product Testing:

- Every unit undergoes comprehensive testing, including performance, safety, and functionality tests, before shipment.

.2 Use of High-Quality Materials and Components

Overview:

- The durability and reliability of our HVAC systems start with the selection of high-quality materials and components. We source our materials from reputable suppliers to ensure longevity and performance.

Key Components:

- Compressors: Our compressors are selected for their efficiency, durability, and low noise levels.

- Heat Exchangers: We use advanced heat exchangers designed for optimal thermal performance and corrosion resistance.

- Control Systems: Our control systems are equipped with the latest technology to provide precise and reliable operation.

- Fans and Motors: High-efficiency fans and motors ensure effective air distribution and energy savings.

.3

Advanced Manufacturing Techniques

Overview:

- Our state-of-the-art manufacturing facilities are equipped with advanced machinery and technology, allowing us to produce HVAC systems with precision and consistency.

Techniques:

- Automation:** Automated production lines enhance consistency, reduce human error, and increase efficiency.

- Lean Manufacturing:** We employ lean manufacturing principles to minimize waste, optimize processes, and ensure high-quality output.

- Continuous Improvement:** Our manufacturing processes are continuously reviewed and improved to maintain the highest quality standards.

.4

Certifications and Standards

Overview:

- Our commitment to quality is validated by adhering to internationally recognized standards and obtaining relevant certifications.

Certifications:

- ISO 9001:** Our quality management system is certified to ISO 9001, ensuring that our processes meet global quality standards.
- ISO 14001:** We are certified to ISO 14001, demonstrating our commitment to environmental management and sustainability.
- ISO 45001:** Our occupational health and safety management system is certified to ISO 45001, ensuring a safe working environment.
- AHRI Certification:** Our products are certified by the Air-Conditioning, Heating, and Refrigeration Institute (AHRI) for performance and efficiency.
- CE Marking:** Our HVAC systems comply with European safety, health, and environmental protection standards.

.5

Customer-Centric Design and Innovation

Overview:

- We prioritize the needs of our customers by incorporating their feedback into our design and innovation processes, ensuring our HVAC systems are user-friendly, efficient, and reliable.

Design Features:

- Energy Efficiency:**

Our products are designed to maximize energy efficiency, reducing operational costs and environmental impact.

- Ease of Maintenance:** We design our systems for easy access and maintenance, reducing downtime and service costs.

- Smart Controls**

Advanced control systems provide intuitive user interfaces and integration with building management systems (BMS).

.6

Overview:

- Every HVAC system we produce undergoes a series of comprehensive tests to validate its performance, safety, and reliability under various conditions.

Testing Procedures:

- **Performance Testing:** Verifies cooling and heating capacities, energy efficiency, and overall system performance.
- **Safety Testing:** Ensures all safety features and components function correctly to protect users and the system.
- **Environmental Testing:** Validates system performance under different environmental conditions, such as extreme temperatures and humidity levels.

Comprehensive Testing and Validation

.7

Dedicated Customer Support and Service

Overview:

- Our commitment to quality extends beyond manufacturing. We provide exceptional customer support and after-sales service to ensure our customers get the most out of their HVAC systems.

Support Services:

- **Technical Assistance:** Our expert team is available to provide technical support and troubleshooting.

Maintenance Programs:

We offer comprehensive maintenance programs to keep systems running efficiently and extend their lifespan.

Training and Resources:

We provide training and resources to help customers understand and maintain their HVAC systems.

Eco-Friendly Chillers: Commitment to Sustainability

efficiency and performance. Here's how our chillers contribute to a greener planet.

Overview:

- Refrigerants play a crucial role in the environmental impact of HVAC systems. Traditional refrigerants often have high global warming potential (GWP) and ozone depletion potential (ODP).

Our Approach:

- Low GWP Refrigerants: We use refrigerants like R-410A, R-134a, R-407C, and R-32, which have zero ODP and lower GWP compared to older refrigerants like R-22.
- Natural Refrigerants: We also offer chillers using natural refrigerants such as R-290 (propane), which have minimal environmental impact.

Benefits:

Reduced contribution to global warming and ozone layer depletion. Compliance with international environmental regulations and standards.

1 Use of Environmentally Friendly Refrigerants

2 High Energy Efficiency



Overview:

- Energy-efficient chillers consume less electricity, which reduces greenhouse gas emissions from power plants.

Our Approach:

- Advanced Compressor Technology: Our chillers are equipped with high-efficiency compressors that optimize energy use.

Benefits:

- Lower operational costs for our customers.
- Reduced carbon footprint due to lower energy consumption.

Variable Speed Drives (VSD):

VSD technology allows the chiller to adjust its cooling capacity based on demand, reducing energy consumption during partial load conditions.

Heat Recovery Systems

Some of our chillers are designed to recover and reuse waste heat, further enhancing energy efficiency.

3 Sustainable Manufacturing Practices

Overview:

- Sustainable manufacturing involves using resources efficiently and minimizing waste and emissions during the production process.

Our Approach:

- Eco-Friendly Materials:** We use materials that are recyclable and have a lower environmental impact.
- Waste Reduction:** Our manufacturing processes are designed to minimize waste through efficient production techniques and recycling programs.
- Energy-Efficient Facilities:** Our production facilities are equipped with energy-efficient lighting, HVAC systems, and machinery to reduce overall energy consumption.

Our Approach:

- Reduced environmental impact from the manufacturing process.
- Enhanced sustainability of our overall operations.

• 4 Intelligent Control Systems

Overview:

- Intelligent control systems enhance the efficiency and performance of chillers by optimizing their operation and monitoring their performance in real-time.

Our Approach:

- **Smart Thermostats:** Our chillers come with advanced monitoring systems that track performance metrics and identify inefficiencies.

- **Real-Time Monitoring:**

Our chillers come with advanced monitoring systems that track performance metrics and identify inefficiencies.

Certifications:

- **Remote Management:** Customers can manage and optimize their chiller operations remotely, ensuring optimal performance and energy use.

Our Approach:

- Increased operational efficiency.
- Early detection of issues, reducing downtime and maintenance costs.

• 5 Long Lifespan and Reliability

Overview:

- Durable and reliable chillers require fewer replacements and repairs, reducing resource use and waste.

Our Approach:

- **Robust Design:** Our chillers are designed to withstand demanding conditions and have a long operational lifespan.

- **Quality Components:**

We use high-quality components to ensure the reliability and longevity of our chillers.

- **Regular Maintenance Programs:** We offer maintenance programs that help extend the life of the chillers and maintain their efficiency.

Benefits:

- Reduced environmental impact due to less frequent manufacturing and disposal of units.
- Long-term cost savings for customers.

• 6 Compliance with Environmental Standards

Overview:

- Adhering to international environmental standards ensures that our chillers meet the highest sustainability criteria.

Our Approach:

- **Certifications:** Our chillers comply with standards such as ISO 14001 for environmental management systems, Energy Star for energy efficiency, and AHRI standards for HVAC performance.

- **Regulatory Compliance:** We ensure that all our products meet or exceed environmental regulations in all markets where they are sold.

Benefits:

- Assurance of eco-friendly and sustainable products for our customers.
- Contribution to global efforts to combat climate change and protect the environment.

Factory Testing of Chillers

Ensuring the quality and reliability of our chillers is a top priority at PST. Before our chillers are shipped to customers, they undergo rigorous factory testing to verify their performance, safety, and efficiency. This process ensures that each unit meets our high standards and provides optimal functionality upon installation. Here is an overview of the testing procedures carried out in our factory.

.1 Functional Testing

Purpose:

- To simulate real operating conditions and ensure that the chiller performs as expected under various loads and conditions.

Process:

- Incoming Material Inspection:**

The chiller is charged with refrigerant and connected to a test loop.

Operation of the chiller under different load conditions to verify cooling capacity and performance.

Monitoring of temperature, pressure, and flow rates in the refrigerant and water circuits.

Testing of the compressor, evaporator, condenser, and expansion valve for proper operation.

- In-Process Quality Checks:** During production, each step is monitored with strict quality checks to ensure adherence to design specifications and standards.

- Final Product Testing:** Every unit undergoes comprehensive testing, including performance, safety, and functionality tests, before shipment.

.2 Performance Testing

Purpose:

- To measure the chiller's efficiency and verify that it meets the specified performance parameters.

Process:

> Measurement of key performance indicators such as Coefficient of Performance (COP), Energy Efficiency Ratio (EER), and cooling capacity.

> Verification of the chiller's ability to reach and maintain the desired temperature setpoints.

> Documentation of performance data for quality assurance and customer reference.

.3 Final Inspection and Documentation

Purpose:

- To perform a final check of the chiller and prepare it for shipment.

Process:

> Comprehensive review of all test results and quality control checklists.

> Cleaning and final preparation of the chiller for shipment.

> Documentation of test results and certification of the chiller's performance and compliance.

COMMERCIAL AND INDUSTRIAL CHILLERS

Pars Sanat Tahvиеh co.

Our chillers are designed to meet the diverse cooling needs of industrial, commercial, and residential environments. Explore our range of chillers and discover how they can benefit your operations.




Industrial Chillers

High-Capacity Industrial Chillers:

Our industrial chillers are engineered for heavy-duty applications, providing robust performance and reliability. They are ideal for manufacturing plants, refineries, and other industrial processes where consistent and efficient cooling is critical.

Compact Industrial Chillers:

These chillers offer powerful cooling in a compact design, making them perfect for environments with limited space. They are suited for data centers, industrial cooling processes, and large commercial buildings, ensuring quiet and efficient operation.




Commercial Chillers

Energy-Efficient Commercial Chillers:

Our commercial chillers are designed to deliver high efficiency, reducing operational costs while maintaining optimal performance. They are perfect for shopping malls, hospitals, and office buildings, providing reliable and precise temperature control.

Versatile Commercial Chillers:

These chillers offer flexible installation options and are easy to maintain, making them an excellent choice for hotels, schools, and commercial complexes. They combine quiet operation with smart energy management features to ensure comfort and efficiency.



Residential Chillers

Compact Residential Chillers:

Designed for residential use, these chillers provide efficient and quiet cooling for large homes, small apartment buildings, and villas. They offer a compact design that is easy to install and maintain, ensuring a comfortable living environment.

Ultra-Quiet Residential Chillers:

Ideal for small homes, individual apartments, and duplexes, these chillers are known for their ultra-quiet operation and energy efficiency. They are perfect for residential settings where noise and energy consumption are important considerations.



PROCESS COOLING
SOLUTIONS



AIR CONDITIONING
SYSTEMS

Pars Sanat Tahvieg co.

**CYGNUS
TECH**

- Air cooled water chillers, heat pumps and condensing units featuring hermetic scroll compressors.
- Cooling capacity **14 - 69.7 kW**



Benefits



- Extremely low noise levels
- High EER/COP values and seasonal performance indices
- Ideally suited to commercial and domestic chilled water air-conditioning applications
- Extended operating limits
- Optimisation of heat pump defrosting cycles thanks to the exclusive Frost Detecting System (FDS) (Minimum ambient temperature in heat pump mode at -10 °C)
- Self-adaptive temperature control (SAC) for efficient operation with installations having low water contents
- Designed for installation in confined spaces:
- Easy to use thanks to a controller with icon-based dual display
- Easy installation and simple access to all chiller components.

Main options

- Configuration without storage tank
- High/low head pressure pump
- Anti-freeze heaters on evaporator, pump and tank
- Remote user interface
- R5485 ModBus interface for connection to supervisor systems
- XWEB300D for local or remote (GPRS) monitoring
- plus data filing based on Web server technology
- Antivibration mountings
- Condenser filters
- Soft starter
- Thermostat (condensing and reversible condensing unit)

Standard Features

- Scroll compressors (051-131) tandem Scroll compressors (181-301)
- Integral hydronic kit complete with pump, tank, expansion vessel, filling/drain valve, pressure gauge, and automatic bleed valve
- Hydraulic threaded connections directly accessible from the exterior of the unit
- Brazed stainless steel plate evaporator
- Axial fans with sickle shaped blades and electronic speed control
- Heat pumps with 2nd thermostatic valve for performance optimisation in all operating conditions (models 131 to 301)
- Factory charged with refrigerant and non-freezing oil
- Protection grade IPX4
- Inspections and tests performed in factory as per all PST products and components
- Environmentally friendly refrigerant R410A with zero ozone depletion potential
- Phase monitor against phase reversal
- Compressor crankcase heater
- Condensers with copper tubes

Versions:

- **CY** - Cooling only
- **HCY** - Reversible heat pump
- **MCCY** - Condensing unit
- **MCHCY** - Reversible condensing unit

Low noise operation of technical systems is essential for continuously occupied premises such as homes, offices and light-commercial buildings, where air conditioning units are usually placed in close proximity to the users. In order to satisfy the specific comfort requirements of these type of premises, without compromising performance in all operating conditions, PST has developed the Cygnus Tech series of minichillers and reversible heat pumps with environmentally friendly refrigerant R410A. The already very low noise levels have been further reduced by installing electronic fan speed controls, which run at lower speeds as cooling or heating demands decrease. Seasonal efficiency levels are even more evident in heat pump operation, with clear benefits in terms of climatic comfort, thanks to the integral storage tank and Frost Deteting System (FDS), designed to detect the quantity of ice accumulating on the external coil, so that defrost cycles are performed only when appropriate, thereby minimising the power consumption.


Model CY

		051	071	091	101	121	181	201	241	271	301					
Cooling capacity	(1) kW	13.9	18.4	23.3	27	29.2	47	54.7	59.5	69.7	78					
Cooling capacity	(1) TR	3.95	5.2	6.6	7.7	8.3	13.4	15.5	16.2	19.8	22					
Total absorbed power	(2) kW	4.4	5.8	7.2	8.5	9.4	14.5	16.8	16.9	22.3	26.3					
EER	(2) -	3.15	3.16	3.2	3.19	3.09	3.23	3.25	3.14	3.12	3.00					
Max external air temperature	°C	51	49	48	48	47	51	50	50	48	47					
EXCHANGERS																
Evaporator pressure drops	kPa	8	32	35	35	34	36	37	37	41	43					
Water flow	m ³ /h	2.4	3.2	4	4.6	5	8.1	9.4	10.2	12	13.4					
GENERAL DATA																
Refrigerant	-	R410A														
Circuits / Compressors	N°	1 / 1					1 / 2									
Refrigerant	V/Ph/Hz	400±10% / 3+N-PE / 50														
Circuits / Compressors	-	IP54														
NOISE LEVEL																
Noise pressure	dB(A)	43	43	43.5	43.5	44	46	46	48.5	49	49					
SIZE AND WEIGHT																
Depth	mm	1605	1605	1950	1950	1950	2505	2505	2505	2505	2505					
Width	mm	742	742	800	800	800	1108	1108	1108	1108	1108					
Height	mm	1425	1425	1238	1238	1238	1710	1710	1710	1910	1910					
Weight (without tank and pump)	kg	192	194	344	361	374	607	613	638	674	680					
Weight (with tank and pump)	kg	313	315	556	574	587	824	830	854	881	895					

(1) External ambient temperature: 35°C; evaporator IN/OUT: 7/12°C

(2) Sound pressure at 10 m: average value obtained in free field on a reflective surface at a distance of 10 m from the side of the condenser coils and at a height of 1.6 m from the unit support base. Values with tolerance ± 2 dB. The sound levels refer to operation of the unit under full load in nominal conditions and with circulation pump.

The listed noise levels, weights and dimensions refer to base chillers with no options fitted. (NB:dimensions for lower noise and/ or higher efficiency versions may differ.)

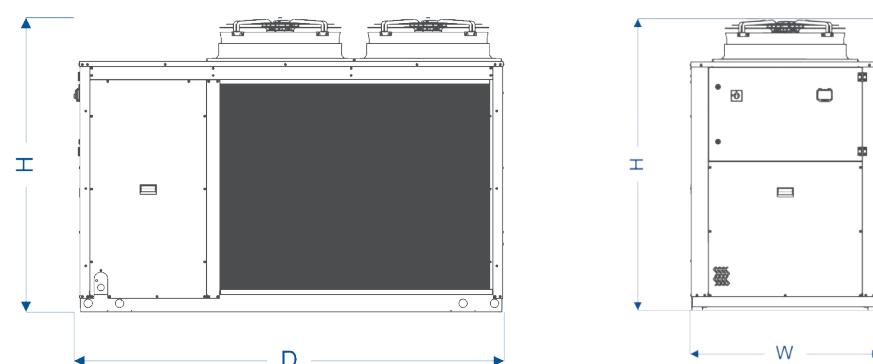



PROCESS COOLING
SOLUTIONS



AIR CONDITIONING
SYSTEMS

Pars Sanat Tahvieg co.

TAURUS TECH

- Air cooled water chillers, heat pumps and condensing units featuring hermetic scroll compressors.
- Cooling capacity **84 - 169 kW**



Benefits



- Refrigerant R410A is an environmentally friendly fluid (zero ozone depletion potential) and provides high performances thanks its outstanding heat conductivity
- 8 base models that perfectly match each specific system requirements
- 2 acoustic versions (HE, SHE) with high efficiency
- Scroll compressors ensure high efficiency, excellent performance and elevated energy savings
- Plug-in solution with integrated pump and tank allows a simple installation
- Extended operating limits: Taurus Tech standardly accepts inlet water temperatures up to 25°C and outlet water temperature down to 0°C. HTaurus Tech working with ambient temperature up to 47°C in cooling mode; outlet water temperature up to 55°C and ambient temperature down to -10°C in heating mode
- Optimisation of performance also in heating mode thanks to hot gas injection and the DDS defrosting system

Main options

- Protection of the hydraulic group by means of panels or metallic mesh
- Coils protection by means of filters or metallic mesh
- Soft starter: are installed on each compressor and allow an average reduction of 30% of the start-up current compared to the direct start
- Shut-off valves on suction side and discharge line of each pair of compressors
- Total heat recovery available for TAT on
- Partial heat recovery (available for TAT and HTAT only)
- Pump options: P15, P2, double P15+P13 or P2+P2 with or without storage tank
- Anti-freeze heater on heat exchangers and hydraulic kit (if present)
- High efficiency EC axial fans with inverter
- Technology and integrated speed regulation or fan speed controller 15 Electronic expansion valve
- Condenser coils designed for aggressive atmosphere
- -20 °C option: it allows the units to operate in cooling mode down to -20 °C ambient temperature
- Anti-vibration mounts
- Thermostatic valves kit for condensing units;
- Remote control kit: VIXX620 display LED, VC1890 display LCD semi-graphic (max 150 m)
- Gateway Modbus/Trend Kit
- Supervisor kits: R5485 ModBus, xWEBSDOD

thanks to hot gas injection and the DDS defrosting system

- Comprehensive safety equipment, including phase monitor, pressure switches, differential pressure switch, crankcase heaters
- Extensive range of accessories and kits, allow each unit to match the specific customer requirements. down to -10 °C in heating mode
- Optimisation of performance also in heating mode thanks to hot gas injection and the DDS defrosting system
- Comprehensive safety equipment, including phase monitor, pressure switches, differential pressure switch, crankcase heaters
- Extensive range of accessories and kits, allow each unit to match the specific customer requirements

Standard Features

- Refrigerant R410A
- 2 Hermetic Scroll compressors in 1 circuit configuration
- shell & tube evaporator
- AC Axial fans with die-cast aluminum blades, developed on the basis of bionic principles
- Air-cooled condensers with longitudinal "V" formation
- High and low refrigerant pressure switches
- Refrigerant pressure gauges
- Parametric microprocessor control IC208CX
- 1P5& protection class
- Phase monitor against phase loss and phase reversal
- Compressor crankcase heater
- Default type of condensers are Microchannel, Copper type can be ordered

Versions:

- **Taurus Tech** - cooling only version
- **HTaurus Tech** - reversible heat pumps with outlet water temperature up to 55 °C
- **MCTaurus Tech** - condensing units
- **HE** - High energy efficiency and basic acoustic configuration
- **SHE** - High energy efficiency and low noise acoustic configuration

Taurus Tech chillers and heat pumps represent the optimal solution for centralised hydronic conditioning of medium sized applications and with the wide range of accessories it is possible to satisfy the installation and start-up unit needs. The parametric microprocessor control, through an user friendly interface allows to modify the unit operating parameters in a simple way. In the heat pumps, the defrosting cycles are automatically and continuously managed with DDS logic (Dynamic Defrosting System) that, unlike commonly adopted solutions, operates only when effectively necessary, optimising defrosting duration and frequency, to the benefit of ambient comfort and operating economy.


Model TAT (HE)

		301	351	401	451	501	551	601
Cooling capacity	(1) kW	84	95	105	132	142	153	169
Cooling capacity	(1) TR	24	27	30	38	40	44	48
Total absorbed power	(2) kW	26	29	33	39	42	47	55
EER	(2) -	3.25	3.25	3.22	3.37	3.35	3.25	3.09
Max external air temperature	°C	50	48	49	50	49	49	48
EXCHANGERS								
Evaporator pressure drops (plate)	kPa	20	20	23	26	30	29	35
Evaporator pressure drops (Shell Tube)	kPa	35	32	39	30	35	43	40
Water flow	m ³ /h	14.4	16.3	18.1	22.7	24.4	26.3	29
GENERAL DATA								
Refrigerant	-	R410A						
Circuits / Compressors	N°	1 / 2						
Refrigerant	V/Ph/Hz	400 ± 10% / 3+N-PE / 50						
Circuits / Compressors	-	IP54						
NOISE LEVEL								
Noise pressure	dB(A)	56	56	58	58	58	59	59
Noise power	dB(A)	88	88	90	90	90	91	91
SIZE AND WEIGHT								
Depth	mm	2800	2800	2800	3810	3910	3910	3910
Width	mm	1100	1100	1100	1100	1100	1100	1100
Height	mm	2170	2170	2170	2170	2170	2170	2170
Weight	kg	813	888	1020	1122	1196	1322	1260

(1) External ambient temperature: 35°C; evaporator IN/OUT: 7/12°C

(2) Sound pressure at 10 m: average value obtained in free field on a reflective surface at a distance of 10 m from the side of the condenser coils and at a height of 1.6 m from the unit support base. Values with tolerance ± 2 dB. The sound levels refer to operation of the unit under full load in nominal conditions and with circulation pump.

(3) Dimensions and operating weights are referred to Taurus Tech cooling only version without options.

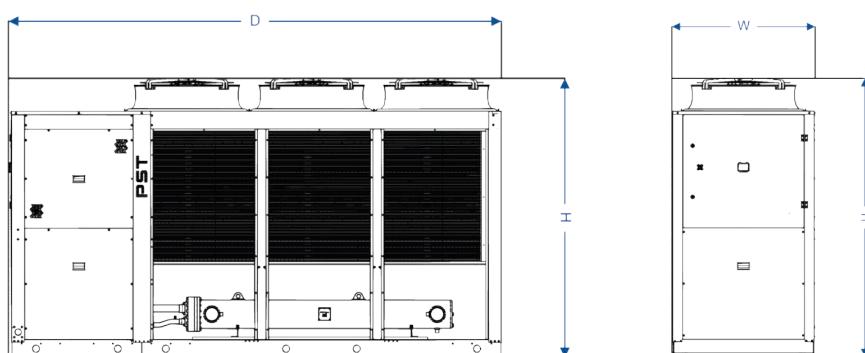


Model TAT (SHE)

		301	351	401	451	501	551	601
Cooling capacity	(1) kW	82	92	102	129	138	148	163
Cooling capacity	(1) TR	23	26	29	37	39	42	46
Total absorbed power	(2) kW	26	29	33	39	42	48	55
EER	(2) -	3.20	3.15	3.09	3.31	3.25	3.12	2.94
Max external air temperature	°C	48	46	46	46	47	47	46
EXCHANGERS								
Evaporator pressure drops (plate)	kPa	20	23	23	25	29	28	33
Evaporator pressure drops (Shell Tube)	kPa	39	55	36	29	33	49	57
Water flow	m ³ /h	14.1	15.8	17.5	22	23.6	25.4	28
GENERAL DATA								
Refrigerant	-	R410A						
Circuits / Compressors	N°	1 / 2						
Refrigerant	V/Ph/Hz	400 ± 10% / 3+N-PE / 50						
Circuits / Compressors	-	IP54						
NOISE LEVEL								
Noise pressure	dB(A)	48	48	50	50	50	51	51
Noise power	dB(A)	80	80	82	82	82	83	83
SIZE AND WEIGHT								
Depth	mm	2800	2800	2800	3910	3910	3910	3910
Width	mm	1100	1100	1100	1100	1100	1100	1100
Height	mm	2170	2170	2170	2170	2170	2170	2170
Weight	kg	813	888	1020	1122	1196	1322	1260

(1) External ambient temperature: 35°C; evaporator IN/OUT: 7/12°C

(2) Sound pressure at 10 m: average value obtained in free field on a reflective surface at a distance of 10 m from the side of the condenser coils and at a height of 1.6 m from the unit support base. Values with tolerance ± 2 dB. The sound levels refer to operation of the unit under full load in nominal conditions and with circulation pump.

(3) Dimensions and operating weights are referred to Taurus Tech cooling only version without options.

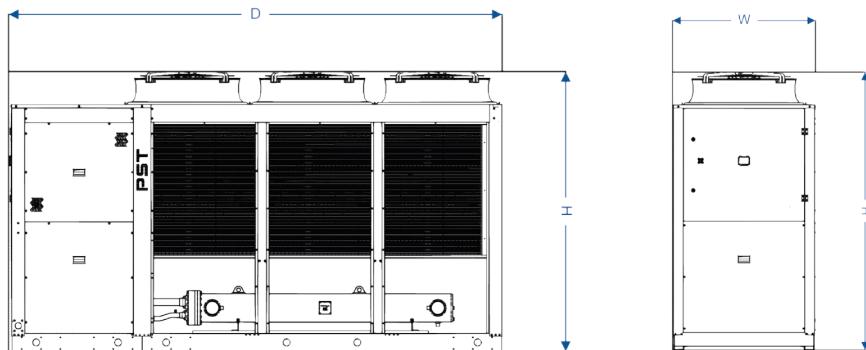



PROCESS COOLING
SOLUTIONS

Pars Sanat Tahvieg co.



AIR CONDITIONING
SYSTEMS

ARIES TECH

- Air cooled water chillers and heat pumps with R410A featuring hermetic scroll compressors.
- Cooling capacity **166 - 340 kW**



Benefits

- Reduced noise levels, thanks also to the availability of three differing acoustic versions
- High EER/COP levels, especially at partial loads

Optimisation of performance also in heat pump mode thanks to hot gas injection and the innovative EcoDefrost defrosting system (min. ambient temperature -10 °C in heat pump mode)



Allows start-up and operation in even the most severe conditions thanks to the unloading function

Simplified installation and easy access to all components

- User friendly controller with multifunctional buttons and dynamic display icons.

Main options

- 4 scroll compressors in parallel within two independent circuits
- Phase monitor against phase reversal
- Compressor crankcase heater
- Single brazed "dual-circuit" stainless steel plate evaporator
- Heat pumps equipped with 2nd thermostatic valve for optimised performance in all operating conditions)
- Axial fans with progressive activation for optimised condensing pressure control, installed in two independent aeraulic sections
- Factory tested and supplied with refrigerant charge and antifreeze oil
- IP54 electric protection rating
- Environmentally friendly refrigerant R410A
- XDRIVE is a microprocessor electronic controller with high computing capacity and user friendly graphic interface
- RS485 ModBus interface for connection to supervisor systems;
- Ethernet connection featuring pre-programmed HTML supervision pages, allowing local or internet based visualization and modification of the operating parameters

Standard Features

- Shell and tube evaporator (AST only)
- 1 or 2 high/low head pressure pumps and water pressure gauge
- Storage tank
- Electronic expansion valves (AST only)
- Compressor shut-off valves on suction and discharge lines
- High efficiency EC inverter fans that allows an high energy savings, special at partial load
- Condenser coils designed for aggressive atmospheres
- Antivibration dampers
- Anti-freeze heaters on evaporator, pump and tank
- Metal mesh filters for condenser coil protection
- Electric power supplies differing from standard
- Soft starter allows about a 20% reduction of the start-up current than direct start
- Victaulic connections
- Simple remote control
- Replicated remote user terminal
- Serial connection to supervisor systems
- MTA XCONNECT supervision based on internal web pages
- Modularity/web interconnection hub
- Default type of condensers are Microchannel, Copper type can be ordered

Versions:

- **AST** - Cooling only
- **HAST** - Reversible heat pump
- **Low ambient air temperature** - down to -20 °C in cooling mode (AST only)
- **H version** - for high external air temperature/high efficiency (only AST)

- **HE** - High energy efficiency and basic acoustic configuration
- **SHE** - High energy efficiency and low noise acoustic configuration

The evolution of commercial chillers.

The air-cooled water chillers ARIES Tech have evolved to fulfil the present and future needs of commercial air conditioning systems. They are extremely customizable to guarantee an easy installation for any plant solution.


The ARIES Tech range is the example of targeted design, essential to obtain a reduced operating cost for air conditioning of medium and large residential or commercial spaces without excluding reliability the environment protection.

Model AST (HE)

		060	070	080	090	100	110	120
Cooling capacity	(1) kW	168	190	208	244	285	306	340
Cooling capacity	(1) TR	48	54	59	69	81	87	97
Total absorbed power	(2) kW	51	57	64	72	85	93	108
EER	(2) -	3.28	3.30	3.24	3.41	3.35	3.28	3.16
Max external air temperature	°C	50	49	48	49	49	48	48
EXCHANGERS								
Evaporator pressure drops	kPa	41	49	41	45	52	47	47
Water flow	m ³ /h	28.8	32.6	35.8	41.9	48.9	52.5	58.4
GENERAL DATA								
Refrigerant	-	R410A						
Circuits / Compressors	N°	2 / 4						
Refrigerant	V/Ph/Hz	400 ± 10% / 3+N-PE / 50						
Circuits / Compressors	-	IP54						
NOISE LEVEL								
Noise pressure	dB(A)	60	60	61	61	62	63	63
Noise power	dB(A)	92	92	93	93	94	95	95
SIZE AND WEIGHT								
Depth	mm	3570	3570	3570	3570	4300	4300	4300
Width	mm	2292	2292	2192	2292	2292	2292	2292
Height	mm	2400	2400	2400	2400	2400	2400	2400
Weight	kg	1862	1916	2043	2442	2785	2785	2956

(1) Evaporator water inlet-outlet temperature 12-7°C, external air temperature 35°C.

(2) Sound pressure at 10 m: Average value obtained in free field on a reflective surface at a distance of 10 m from the side of the condenser coils and at a height of 1.6 m from the unit support base. Values with tolerance +/-2. The sound levels refer to operation of the unit under full load in nominal conditions and with circulation pump. The listed noise levels, weights and dimensions refer to base chillers with no options fitted.

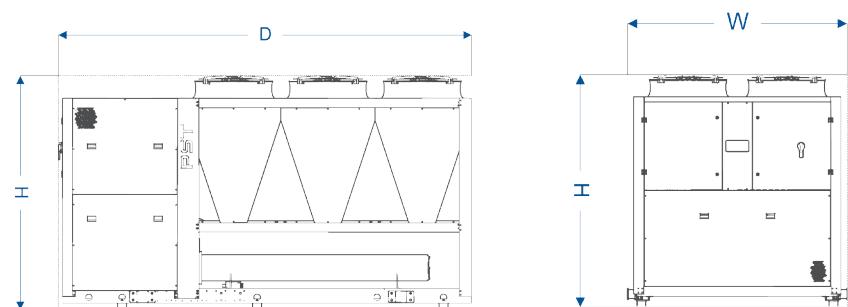


Model AST (SHE)

		060	070	080	090	100	110	120
Cooling capacity	(1) kW	164	184	202	239	278	296	328
Cooling capacity	(1) TR	47	52	58	68	79	84	93
Total absorbed power	(2) kW	50	58	65	70	855	94	110
EER	(2) -	3.25	3.20	3.13	3.40	3.28	3.17	2.99
Max external air temperature	°C	48	47	45	47	46	45	45
EXCHANGERS								
Evaporator pressure drops	kPa	39	48	39	43	50	44	44
Water flow	m ³ /h	28.2	31.6	34.7	41	47.7	50.9	56.3
GENERAL DATA								
Refrigerant	-	R410A						
Circuits / Compressors	N°	2 / 4						
Refrigerant	V/Ph/Hz	400 ± 10% / 3+N-PE / 50						
Circuits / Compressors	-	IP54						
NOISE LEVEL								
Noise pressure	dB(A)	52	52	53	54	55	55	56
Noise power	dB(A)	84	84	85	86	87	87	88
SIZE AND WEIGHT								
Depth	mm	3570	3570	3570	3570	4300	4300	4300
Width	mm	2292	2292	2292	2292	2292	2292	2292
Height	mm	2400	2400	2400	2400	2400	2400	2400
Weight	kg	1862	1916	2043	2442	2785	2785	2956

(1) Evaporator water inlet-outlet temperature 12-7°C, external air temperature 35°C.

(2) Sound pressure at 10 m: Average value obtained in free field on a reflective surface at a distance of 10 m from the side of the condenser coils and at a height of 1.6 m from the unit support base. Values with tolerance +/-2. The sound levels refer to operation of the unit under full load in nominal conditions and with circulation pump. The listed noise levels, weights and dimensions refer to base chillers with no options fitted.

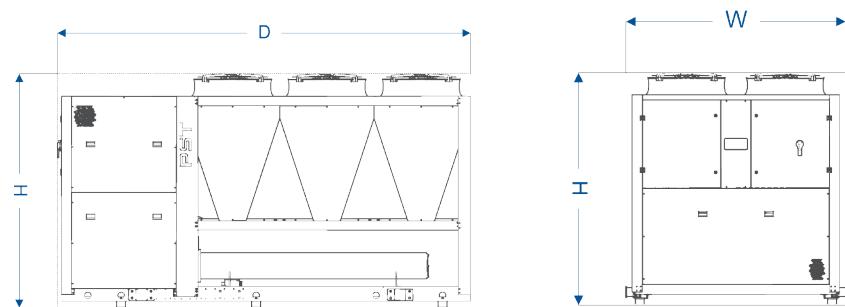



PROCESS COOLING
SOLUTIONS

Pars Sanat Tahvieg co.



AIR CONDITIONING
SYSTEMS

GALAXY TECH

- Air cooled water chillers with R410A featuring hermetic scroll compressors.
- Cooling capacity 356 - 868



Benefits



- Reduced noise levels, thanks also to the availability of differing acoustic versions
- High EER/COP levels, especially at partial loads
- Ideal for large hydronic air conditioning installations in public and private surroundings
- Allows start-up and operation in even the most severe conditions

Main options

- 1 or 2 pumps and water pressure gauge;
- Storage tank
- Condenser coils designed for aggressive atmospheres
- Metal mesh filters for condenser coil protection
- High efficiency EC axial fans with inverter technology and integrated speed regulation; or fan speed controller
- Antifreeze heater on evaporator, pumps and tank
- Antivibration dampers
- Serial connection to supervisor systems
- MTA CONNECT supervision based on internal web pages
- Modularity / web interconnection hub
- Replicated remote user terminal
- Soft starter: are installed on each compressor and allow a reduction from 10 to 20% (depending by the model) of the start up current compared to the direct start
- Victaulic connections
- Simple remote control
- Special execution with partial or total heat recovery exchangers
- Special execution for water temperatures down to -10°C

Versions:

- **Low ambient air temperature** - down to -20°C in cooling mode
- High energy efficiency versions
 - **HE**-High energy efficiency and basic acoustic configuration
 - **SHE**-High energy efficiency and low noise acoustic configuration

- Easy installation with direct access to the water connections and the applications of victaulic connections;
- Simple to install and maintain, easily accessible components
- User friendly controller with multifunctional buttons and dynamic display icons

Standard Features

- Multiple scroll compressors (4 to 8 depending on the model) connected in parallel (tandem or trio) on 2 or 4 independent refrigeration circuits
- Shut-off valve and solenoid valve on the liquid line in each refrigeration circuit
- xDRIVE is a microprocessor electronic controller with high computing capacity and user friendly graphic interface: XORIVE features the ModBUS-RTU communication protocol as standard, allowing connection with the most widely utilised Building Management Systems (BMS!. It also features an Ethernet port as standard, with HTML supervision pages preloaded for connection to a company intranet or the Internet
- The DRIVE can manage in master/slave mode up to 8 units
- Phase monitor against phase loss and phase reversal and checks the operating voltage limits
- AC axial fans with die-cast aluminum blades, developed on the basis of bionic principles with progressive starting for condensing pressure control
- Electronic expansion valve
- High and low pressure transducer
- Water differential pressure switch, air bleed valve and water drain valve
- Factory tested and supplied with refrigerant charge and antifreeze oil
- Environmentally friendly refrigerant R410A with zero ozone depletion potential
- All the compressors are equipped with crankcase heaters
- Compressor housings for acoustic insulation
- Special execution with shell and tube evaporator
- Default type of condensers are Microchannel, Copper type can be ordered

The energy efficiency and the reliability.

Operation at partial loads corresponds to the largest portion of the working life of a unit dedicated to air conditioning applications: typically thermal loads vary widely both during the year and throughout each 24 hour period. The subdivision of the total cooling capacity over a large number of capacity steps, rendered possible thanks to the implementation of multi-scroll technology and environmentally friendly refrigerant R410A, ensure maximised performance at partial loads, resulting in seasonal energy savings of more than 16% with respect to conventional solutions. The multi-scroll configuration offers a lightweight solution, and permits the volume reduction of the storage tank with the associated dispersal of cooling energy, thus further reducing the static loading on the unit supports. Progressive stopping of the compressors and fans means that Galaxy Tech is extremely quiet in operation, rendering it ideal for installation in noise-sensitive surroundings.


Model GLT (HE)

	120	140	160	170	180	200	220	230	240	260	280	300	320									
Cooling capacity	(1) kW	356	394	434	478	528	572	614	630	651	744	788	822	868								
Cooling capacity	(1) TR	101	112	123	136	150	163	175	179	185	212	224	234	247								
Total absorbed power	(2) kW	106	121	137	148	158	173	188	196	205	226	241	257	273								
EER	(2) -	3.37	3.26	3.17	3.24	3.34	3.31	3.26	3.20	3.17	3.29	3.26	3.20	3.17								
Max external air temperature	°C	50	48	48	48	49	49	48	47	48	48	48	48	48								
EXCHANGERS																						
Evaporator pressure drops	kPa	28	32	44	50	30	26	52	57	52	39	40	43	46								
Water flow	m ³ /h	61.1	67.6	74.5	82	90.6	98.2	105.4	108	111.7	127.7	135.3	141	149								
GENERAL DATA																						
Refrigerant	-	R410A																				
Circuits / Compressors	N°	2 / 4			2 / 5		2 / 6				4 / 8											
Refrigerant	V/Ph/Hz	400 ± 10% / 3+N-PE / 50																				
Circuits / Compressors	-	IP54																				
NOISE LEVEL																						
Noise pressure	dB(A)	65	65	65	65	65	65	66	66	66	66	67	67	67								
Noise power	dB(A)	97	97	97	97	98	98	99	99	99	99	100	100	100								
SIZE AND WEIGHT																						
Depth	mm	4490	4490	4490	5490	6490	6490	6490	6490	6490	8490	8490	8490	8490								
Width	mm	2194	2194	2194	2194	2194	2194	2194	2194	2194	2194	2194	2194	2194								
Height	mm	2670	2670	2670	2670	2670	2670	2670	2670	2670	2670	2670	2670	2670								
Weight	kg	3750	3902	3920	4565	5357	5425	5865	5557	5599	6025	7365	7649	7773								

(1) External ambient temperature: 35° C; evaporator IN/OUT: 7/12°C

(2) Sound pressure at 10 m: average value obtained in free field on a reflective surface at a distance of 10 m from the side of the condenser coils and at a height of 1.6 m from the unit support base. Values with tolerance ± 2 dB. The sound levels refer to operation of the under full load in nominal conditions and with circulation pump.

The listed noise levels, weights and dimensions refer to base chillers with no options fitted. INB: dimensions for lower noise or higher efficiency versions may differ.)

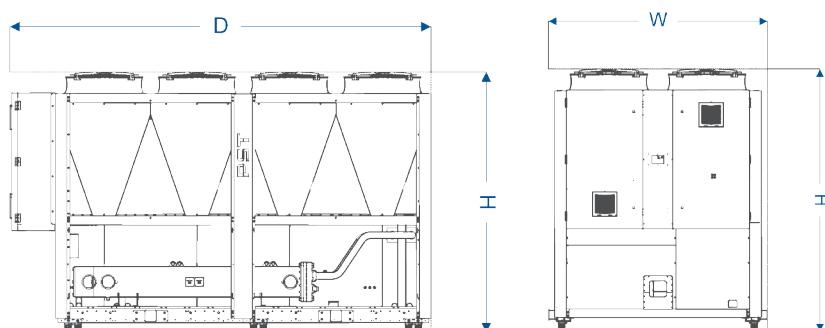


Model GLT (SHE)

		120	140	160	170	180	200	220	230	240	260	280	300	320										
Cooling capacity	kW	342	384	424	463	507	556	597	613.5	633	726	770	803	848										
Cooling capacity	TR	97.24	109.20	120.56	131.6	144.2	158	169.7	174.4	179.9	206.4	218.9	228.3	241.1										
Total absorbed power	kW	106.57	120.5	137.5	148.6	159.3	172.6	189	197.3	206.2	224.3	240.5	257.3	274.9										
EER	-	3.21	3.19	3.08	3.12	3.18	3.22	3.16	3.11	3.07	3.24	3.20	3.12	3.06										
Max external air temperature	°C	49	47	46	46	49	48	47	46	46	47	47	46	46										
EXCHANGERS																								
Evaporator pressure drops	kPa	33	20	42	47	50	42	42	44	45	38	33	35	38										
Water flow	m³/h	58.7	65.91	72.78	79.47	87.03	95.44	102.47	105.31	108.65	124.62	132.17	137.83	144.19										
GENERAL DATA																								
Refrigerant	-	R410A																						
Circuits / Compressors	N°	2/4			2/5		2/6				4/8													
Refrigerant	V/Ph/Hz	400 ± 10% / 3 - PE / 50																						
Circuits / Compressors	-	IP54																						
NOISE LEVEL																								
Noise pressure	dB(A)	57	57	57	57	57	57	58	58	58	58	59	59	59										
Noise power	dB(A)	89	89	89	89	90	90	91	91	91	91	92	92	92										
SIZE AND WEIGHT																								
Depth	mm	4490	4490	4490	5490	6490	6490	6490	6490	6490	8490	8490	8490	8490										
Width	mm	2194	2194	2194	2194	2194	2194	2194	2194	2194	2194	2194	2194	2194										
Height	mm	2670	2670	2670	2670	2670	2670	2670	2670	2670	2670	2670	2670	2670										
Weight	kg	3802	3982	4006	4765	5523	5607	5865	5877	5889	7840	7865	8149	8173										

(1) External ambient temperature: 35° C; evaporator IN/OUT: 7/12°C

(2) Sound pressure at 10 m: average value obtained in free field on a reflective surface at a distance of 10 m from the side of the condenser coils and at a height of 1.6 m from the unit support base. Values with tolerance ± 2 dB. The sound levels refer to operation of the under full load in nominal conditions and with circulation pump.

The listed noise levels, weights and dimensions refer to base chillers with no options fitted. INB: dimensions for lower noise or higher efficiency versions may differ.)

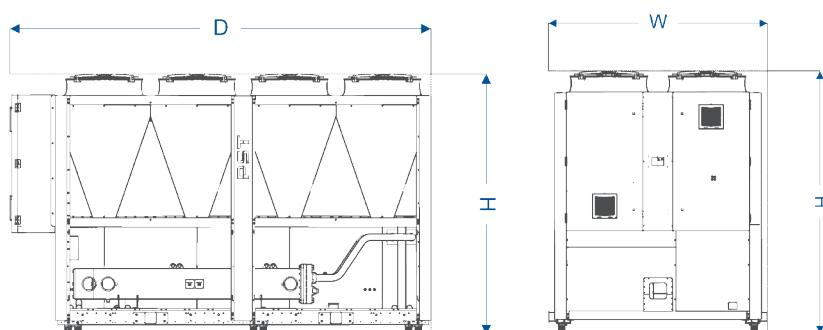



PROCESS COOLING
SOLUTIONS



AIR CONDITIONING
SYSTEMS

Pars Sanat Tahvиеh co.

PHOENIX PLUS

- Air cooled water chillers with R134a featuring semi-hermetic twin screw compressors.
- Cooling capacity **316 - 1473 kW**



Benefits



- High energy efficiency both at full load and at partial load A Class)
- High seasonal energy efficiency
- The controller provides maximum flexibility to adapt to any operating condition, thanks to the Smart Stepless algorithm specifically developed by PST
- High reliability and continuity of operation (up to 4 screw compressors and "Smart Stepless")
- Wide operating range ambient temp
- Comprehensive safety equipment, including phase monitor, pressure switches, differential pressure switch, crankcase heaters, compressors operating envelope and oil level
- Wide range of accessories and kits for custom solutions
- Integration with AQUAFree free-cooling modules

Main options

- High efficiency EC axial fans with inverter technology and integrated speed regulation; or fan speed controller
- Condenser coils with anticorrosion treatment
- Soft starter
- Antivibration dampers
- Special applications with partial or total heat recovery
- Special applications for water temperatures down to -10°C
- Special very high efficiency applications;
- Antifreeze heater
- Metal mesh filters for condenser coil protection;
- Replicated remote user terminal
- Simple remote control
- Serial connection to supervision systems
- PST CONNECT Supervision based on internal web pages
- Modularity / web interconnection hub

Standard Features

- Environmentally friendly R134a refrigerant.
- High efficiency screw compressors with stepless regulation optimized for R134a refrigerant gas.
- Compressor crankcase heater.
- Compressor housings
- Air-cooled condensers (copper tubes/aluminium fins) with transverse "V" formation; om -20°C to+50°C
- AC Axial fans with die-cast aluminum blades, developed on the basis of bionic principles
- Check valve on compressor discharge and shut-off valves on discharge and suction lines
- Electronic expansion valves
- Single pass shell & tubes evaporator optimized for R134a refrigerant gas
- The Electrical panel is made up of IP 54 cabinet with forced ventilation, inside which are installed contactors and circuit breakers; the protection from the phase loss and from the phase reversal is assured by the phase monitor device
- DRIVE controller programmed with software specifically developed by PST
- high computing capacity and user friendly graphic interface
- connectivity and supervision via Ethernet, USB, RS485 Modbus.
- Default type of condensers are Microchannel (Except HHE type), Copper type can be ordered

Versions:

- **Low ambient air temperature version** - down to -20°C in cooling mode. with EC axial fans
- Standard energy efficiency versions:
 - **INVERTER** - variable-speed inverter technology with excellent efficiency at full and partial loads
- High energy efficiency versions:

- **HE** - basic acoustic configuration optimized for full load operation
- **SHE** - low noise acoustic configuration optimized for part load operation
- **HHE** - high ambient temperature and basic acoustic configuration optimized for full load operation.

The PHOENIX Plus range of chillers has been specifically designed to optimize the benefits of refrigerant R134a; their maximum advantage is achieved in those installations where the chiller operates below its design load conditions for most of the year.

Thanks to unique technical solutions and Smart Stepless regulation according to the exact effective cooling load requested by the system, PHOENIX Plus achieves market leading ESEER seasonal performance ratios, as well as nominal load EER ratios which are well above the minimum limit of the Class A energy efficiency category.


Model PNP (HE)

		140	150	160	170	180	200	220	235	250	265	280	300	320
Cooling capacity	(1) kW	316	359	375	398	424	455	490	523	562	591	628	685	758
Cooling capacity	(1) TR	90	102	107	113	120	129	139	149	160	168	179	195	216
Total absorbed power	(2) kW	92	105	112	120	130	139	149	156	164	176	188	203	219
EER	(2) -	3.43	3.42	3.34	3.30	3.27	3.28	3.29	3.35	3.42	3.37	3.34	3.38	3.46
Max external air temperature	°C	51	49	50	49	49	48	47	47	49	49	49	49	49
EXCHANGERS														
Evaporator pressure drops	kPa	23	43	45	38	38	34	33	37	29	42	33	39	59
Water flow	m ³ /h	54.2	61.7	64.4	68.3	72.8	78.1	84.1	89.8	96.5	101.4	107.8	117.6	130.1
GENERAL DATA														
Refrigerant	-	R134A												
Circuits / Compressors	N°	2 / 2												
Capacity control	%	12.5 ~ 100												
Power supply	V/Ph/Hz	400 ± 10% / 3+N-PE / 50												
Protection class	-	IP54												
NOISE LEVEL														
Noise pressure	dB(A)	66	66	66	67	67	67	68	68	68	68	68	68	69
Noise power	dB(A)	98	98	98	99	99	100	100	100	100	100	100	101	102
SIZE AND WEIGHT														
Depth	mm	4490	4490	4490	4490	4490	4490	4490	5490	6490	6490	6490	7490	8490
Width	mm	2194	2194	2194	2194	2194	2194	2194	2194	2194	2194	2194	2194	2194
Height	mm	2670	2670	2670	2670	2670	2670	2670	2670	2670	2670	2670	2670	2670
Weight	kg	3764	3920	4605	4665	4890	4895	5016	5621	6091	6208	6321	7365	8380

(1) External ambient temperature: 35°C; evaporator IN/OUT: 7/12°C

(2) Sound pressure at 10 m: average value obtained in free field on a reflective surface at a distance of 10 m from the side of the condenser coils and at a height of 1.6 m from the unit support base. Values with tolerance ± 2 dB. The sound levels refer to operation of the unit under full load in nominal conditions and with circulation pump.

or higher efficiency versions may differ. Versions refer to base chillers with no options fitted. (NB: dimensions for lower noise and/or higher efficiency versions may differ.)

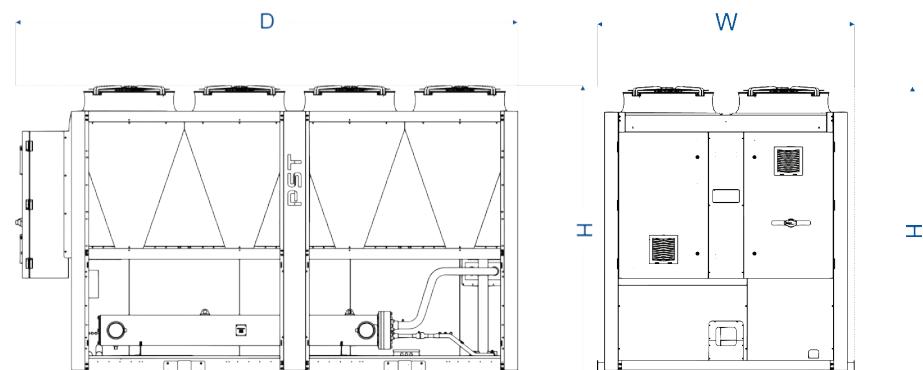


Model PNP (HE)

	360	375	405	420	440	460	480	500	520	540	570	600	630	
Cooling capacity	(1) kW	801	843	901	942	999	1056	1137	1183	1229	1299	1348	1397	1473
Cooling capacity	(1) TR	228	240	300	268	284	300	323	336	349	369	383	397	419
Total absorbed power	(2) kW	238	246	256	282	297	312	329	343	357	374	393	413	435
EER	(2) -	3.37	3.42	3.35	3.34	3.37	3.39	2.46	3.45	3.44	3.47	3.43	3.38	3.39
Max external air temperature	°C	47	49	49	49	49	49	49	47	47	47	47	47	47
EXCHANGERS														
Evaporator pressure drops	kPa	52	43	46	44	39	43	43	34	44	55	53	34	51
Water flow	m ³ /h	137.5	144.7	154.7	161.7	171.5	181.3	195.2	203.1	211	223	231.4	240	252.8
GENERAL DATA														
Refrigerant	-	R134A												
Circuits / Compressors	N°	3 / 3												
Capacity control	%	8.3 ~ 100												
Power supply	V/Ph/Hz	400 ± 10% / 3+N-PE / 50												
Protection class	-	IP54												
NOISE LEVEL														
Noise pressure	dB(A)	69	69	70	70	70	70	70	70	70	71	71	71	71
Noise power	dB(A)	102	102	103	103	103	103	103	103	103	104	104	104	104
SIZE AND WEIGHT														
Depth	mm	8490	9490	9490	9490	10490	11490	12490	12490	12490	12490	12490	12490	12490
Width	mm	2194	2194	2194	2194	2194	2194	2194	2194	2194	2194	2194	2194	2194
Height	mm	2670	2670	2670	2670	2670	2670	2670	2670	2670	2670	2670	2670	2670
Weight	kg	8580	9080	9357	9554	10400	11400	12580	12820	13037	13490	13680	13680	13749

(1) External ambient temperature: 35°C; evaporator IN/OUT: 7/12°C

(2) Sound pressure at 10 m: average value obtained in free field on a reflective surface at a distance of 10 m from the side of the condenser coils and at a height of 1.6 m from the unit support base. Values with tolerance ± 2 dB. The sound levels refer to operation of the unit under full load in nominal conditions and with circulation pump.

or higher efficiency versions may differ. Versions refer to base chillers with no options fitted. (NB: dimensions for lower noise and/or higher efficiency versions may differ.)

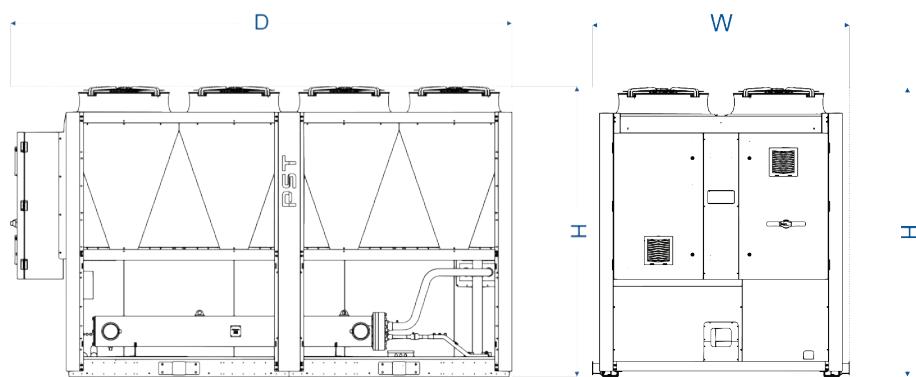


Model PNP (SHE)

		140	150	160	170	180	200	220	235	250	265	280	300	320
Cooling capacity	(1) kW	308	350	365	386	410	438	472	506	546	573	608	664	736
Cooling capacity	(1) TR	88	100	104	110	117	125	134	144	155	163	173	189	209
Total absorbed power	(2) kW	90	104	112	121	130	140	151	157	163	176	189	203	218
EER	(2) -	3.42	3.37	3.26	3.19	3.14	3.12	3.13	3.23	3.35	3.26	3.22	3.28	3.38
Max external air temperature	°C	49	47	48	46	46	45	45	45	46	46	46	46	46
EXCHANGERS														
Evaporator pressure drops	kPa	40	41	44	36	34	27	37	40	32	31	40	48	38
Water flow	m ³ /h	52.9	60.1	62.6	66.2	70.4	75.2	81	86.9	93.7	98.4	104.4	114	126.3
GENERAL DATA														
Refrigerant	-	R134A												
Circuits / Compressors	N°	2 / 2												
Capacity control	%	12.5 ~ 100												
Power supply	V/Ph/Hz	400 ± 10% / 3+N-PE / 50												
Protection class	-	IP54												
NOISE LEVEL														
Noise pressure	dB(A)	58	58	58	59	59	59	60	60	60	60	60	60	60
Noise power	dB(A)	90	90	90	91	91	91	92	92	92	93	93	93	93
SIZE AND WEIGHT														
Depth	mm	4490	4490	4490	4490	4490	4490	4490	5490	6490	6490	6490	7490	8490
Width	mm	2194	2194	2194	2194	2194	2194	2194	2194	2194	2194	2194	2194	2194
Height	mm	2670	2670	2670	2670	2670	2670	2670	2670	2670	2670	2670	2670	2670
Weight	kg	3764	3920	4605	4665	4890	4895	5016	5621	6091	6208	6321	7365	8380

(1) External ambient temperature: 35°C; evaporator IN/OUT: 7/12°C

(2) Sound pressure at 10 m: average value obtained in free field on a reflective surface at a distance of 10 m from the side of the condenser coils and at a height of 1.6 m from the unit support base. Values with tolerance ± 2 dB. The sound levels refer to operation of the unit under full load in nominal conditions and with circulation pump.

or higher efficiency versions may differ. Versions refer to base chillers with no options fitted. (NB: dimensions for lower noise and/or higher efficiency versions may differ.)

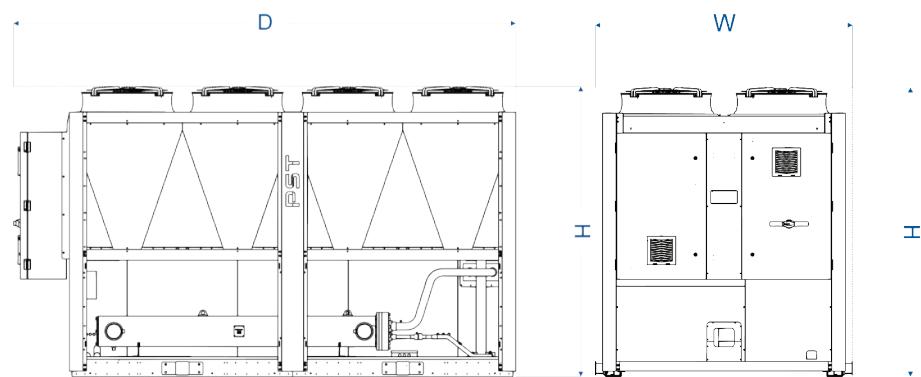


Model PNP (SHE)

		360	375	405	420	440	460	480	500	520	540	570	600	630
Cooling capacity	(1) kW	776	819	873	912	968	1024	1104	1147	1190	1257	1304	1351	1419
Cooling capacity	(1) TR	221	233	248	259	275	291	314	326	338	357	371	384	403
Total absorbed power	(2) kW	238	245	270	284	297	311	327	342	357	374	396	417	442
EER	(2) -	3.26	3.35	3.24	3.22	3.26	3.29	3.38	3.36	3.33	3.36	3.30	3.24	3.21
Max external air temperature	°C	45	46	46	46	46	46	47	45	45	44	44	44	44
EXCHANGERS														
Evaporator pressure drops	kPa	50	42	47	43	30	33	43	33	43	54	42	32	49
Water flow	m ³ /h	133.2	140.6	149.9	156.5	166.2	175.8	189.5	196.7	204.3	215.8	223.9	231.9	243.6
GENERAL DATA														
Refrigerant	-	R134A												
Circuits / Compressors	N°	3 / 3												
Capacity control	%	8.3 ~ 100												
Power supply	V/Ph/Hz	400 ± 10% / 3+N-PE / 50												
Protection class	-	IP54												
NOISE LEVEL														
Noise pressure	dB(A)	61	61	62	62	62	62	62	62	62	63	63	63	63
Noise power	dB(A)	94	94	95	95	95	95	95	95	95	96	96	96	96
SIZE AND WEIGHT														
Depth	mm	8490	9490	9490	9490	10490	12490	12490	12490	12490	12490	12490	12490	12490
Width	mm	2194	2194	2194	2194	2194	2194	2194	2194	2194	2194	2194	2194	2194
Height	mm	2670	2670	2670	2670	2670	2670	2670	2670	2670	2670	2670	2670	2670
Weight	kg	8580	9080	9357	9554	11400	12580	12597	12820	13037	13490	13680	13680	13749

(1) External ambient temperature: 35°C; evaporator IN/OUT: 7/12°C

(2) Sound pressure at 10 m: average value obtained in free field on a reflective surface at a distance of 10 m from the side of the condenser coils and at a height of 1.6 m from the unit support base. Values with tolerance ± 2 dB. The sound levels refer to operation of the unit under full load in nominal conditions and with circulation pump.

or higher efficiency versions may differ. Versions refer to base chillers with no options fitted. (NB: dimensions for lower noise and/or higher efficiency versions may differ.)

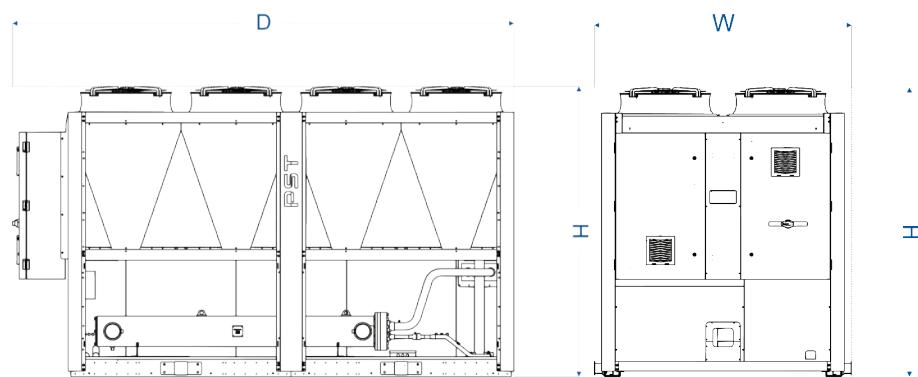


Model PNP (HHE)

		160	180	200	220	250	265	280	300	320	340
Cooling capacity	(1) kW	267	307	362	408	434	465	500	520	546	588
Cooling capacity	(1) TR	76	87	103	116	123	139	142	156	155	177
Total absorbed power	(2) kW	83.8	94.9	112.6	127	135.6	143.7	152.2	162.2	172.9	184.2
EER	(2) -	3.18	3.24	3.22	3.21	3.20	3.24	3.29	3.21	3.16	3.19
Max external air temperature	°C	53	53	53	53	53	53	53	53	53	53
EXCHANGERS											
Evaporator pressure drops	kPa	37	44	37	43	54	46	33	43	40	42
Water flow	m ³ /h	45.8	52.7	62.2	70	74.5	79.8	85.8	89.3	93.7	100.9
GENERAL DATA											
Refrigerant	-	R134A									
Circuits / Compressors	N°	2 / 2									
Capacity control	%	12.5 ~ 100									
Power supply	V/Ph/Hz	400 ± 10% / 3 + N - PE / 50									
Protection class	-	IP54									
NOISE LEVEL											
Noise pressure	dB(A)	66	66	67	67	67	67	68	68	68	68
Noise power	dB(A)	98	98	99	99	99	99	100	100	100	101
SIZE AND WEIGHT											
Depth	mm	6490	6490	6490	6490	6490	6490	6490	7490	8490	8490
Width	mm	2194	2194	2194	2194	2194	2194	2194	2194	2194	2194
Height	mm	2670	2670	2670	2670	2670	2670	2670	2670	2670	2670
Weight	kg	4426	4783	5117	5147	5756	5886	6251	6369	7131	7711

(1) External ambient temperature: 35°C; evaporator IN/OUT: 7/12°C

(2) Sound pressure at 10 m: average value obtained in free field on a reflective surface at a distance of 10 m from the side of the condenser coils and at a height of 1.6 m from the unit support base. Values with tolerance ± 2 dB. The sound levels refer to operation of the unit under full load in nominal conditions and with circulation pump.

or higher efficiency versions may differ. Versions refer to base chillers with no options fitted. (NB: dimensions for lower noise and/or higher efficiency versions may differ.)

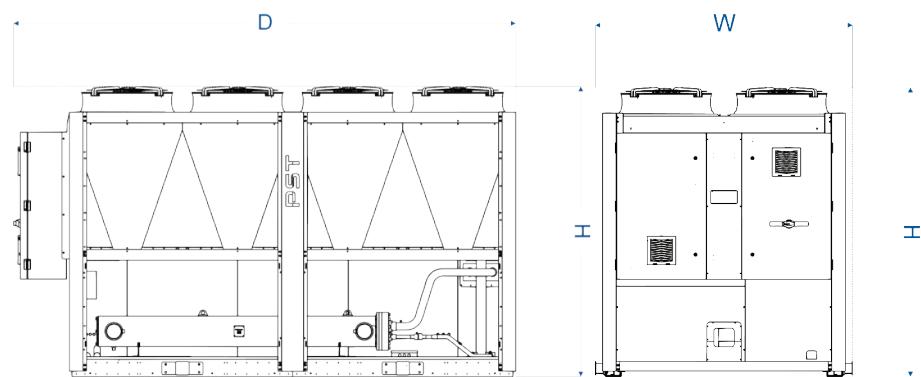


Model PNP (HHE)

		360	405	420	480	530	560	600	640	720								
Cooling capacity	(1) kW	640	713	750	819	930	1000	1040	1092	1280								
Cooling capacity	(1) TR	182	203	213	233	264	284	296	311	364								
Total absorbed power	(2) kW	196.4	219.5	228.2	259.3	287.3	304.3	324.4	345.8	392.8								
EER	(2) -	3.26	3.26	3.29	3.16	3.24	3.29	3.21	3.16	3.26								
Max external air temperature	°C	53	53	53	53	53	53	53	53	53								
EXCHANGERS																		
Evaporator pressure drops	kPa	43	46	35	38	36	28	39	44	51								
Water flow	m ³ /h	109.9	122.4	128.7	140.6	159.6	171.6	178.5	187.4	219.7								
GENERAL DATA																		
Refrigerant	-	R134A																
Circuits / Compressors	N°	2 / 2	3 / 3			4 / 4												
Capacity control	%	12.5 ~ 100	8.3 ~ 100			6.3 ~ 100												
Power supply	V/Ph/Hz	400 ± 10% / 3 + N - PE / 50																
Protection class	-	IP54																
NOISE LEVEL																		
Noise pressure	dB(A)	68	68	68	69	69	70	70	70	71								
Noise power	dB(A)	101	101	101	102	102	103	103	103	104								
SIZE AND WEIGHT																		
Depth	mm	8490	9490	9490	12490	12490	12490	14490	16490	16490								
Width	mm	2194	2194	2194	2194	2194	2194	2194	2194	2194								
Height	mm	2670	2670	2670	2670	2670	2670	2670	2670	2670								
Weight	kg	8292	10034	10393	10746	13511	13771	14006	14716	17329								

(1) External ambient temperature: 35°C; evaporator IN/OUT: 7/12°C

(2) Sound pressure at 10 m: average value obtained in free field on a reflective surface at a distance of 10 m from the side of the condenser coils and at a height of 1.6 m from the unit support base. Values with tolerance ± 2 dB. The sound levels refer to operation of the unit under full load in nominal conditions and with circulation pump.

or higher efficiency versions may differ. Versions refer to base chillers with no options fitted. (NB: dimensions for lower noise and/or higher efficiency versions may differ.)

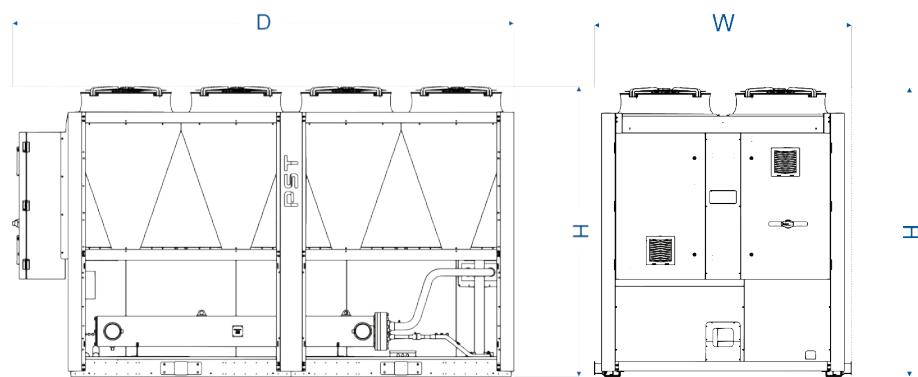



PROCESS COOLING
SOLUTIONS



AIR CONDITIONING
SYSTEMS

Pars Sanat Tahvиеh co.

PHOENIX INVERTER

- Air cooled water chillers with R134a featuring semi-hermetic twin inverter screw compressors.
- Cooling capacity **496 - 1234 kW**




Model PNP - i (HE)

		215	235	250	285	320	360	400	440	480						
Cooling capacity	(1) kW	496	535	590	661	752	828	926	1057	1234						
Cooling capacity	(1) TR	141	152	168	188	214	235	263	300	351						
Total absorbed power	(2) kW	150.9	160.9	174.3	197.4	222.9	250.3	268.4	320.8	364.8						
EER	(2) -	3.29	3.33	3.39	3.35	3.37	3.31	3.3	3.29	3.38						
Max external air temperature	°C	49	47	50	50	50	50	50	49	49						
EXCHANGERS																
Evaporator pressure drops	kPa	52	33	33	45	46	30	56	38	48						
Water flow	m ³ /h	85.1	91.8	101.3	113.5	129.1	142.1	158.9	181.4	211.8						
GENERAL DATA																
Refrigerant	-	R134A														
Circuits / Compressors	N°	2/(1+i)			2/2i											
Capacity control	%	12.5 ~ 100														
Power supply	V/Ph/Hz	400 ± 10% / 3+N-PE / 50														
Protection class	-	IP54														
NOISE LEVEL																
Noise pressure	dB(A)	67	67	68	68	68	68	69	71	72						
Noise power	dB(A)	99	99	100	100	101	101	102	104	105						
SIZE AND WEIGHT																
Depth	mm	5490	5490	5490	6490	7490	8490	9490	10490	11490						
Width	mm	2194	2194	2194	2194	2194	2194	2194	2194	2194						
Height	mm	2670	2670	2670	2670	2670	2670	2670	2670	2670						
Weight	kg	5898	6143	6198	6450	6703	6955	7208	7831	8453						

(1) External ambient temperature: 35°C; evaporator IN/OUT: 7/12°C

(2) Sound pressure at 10 m: average value obtained in free field on a reflective surface at a distance of 10 m from the side of the condenser coils and at a height of 1.6 m from the unit support base. Values with tolerance ± 2 dB. The sound levels refer to operation of the unit under full load in nominal conditions and with circulation pump.

or higher efficiency versions may differ. Versions refer to base chillers with no options fitted. (NB: dimensions for lower noise and/or higher efficiency versions may differ.)

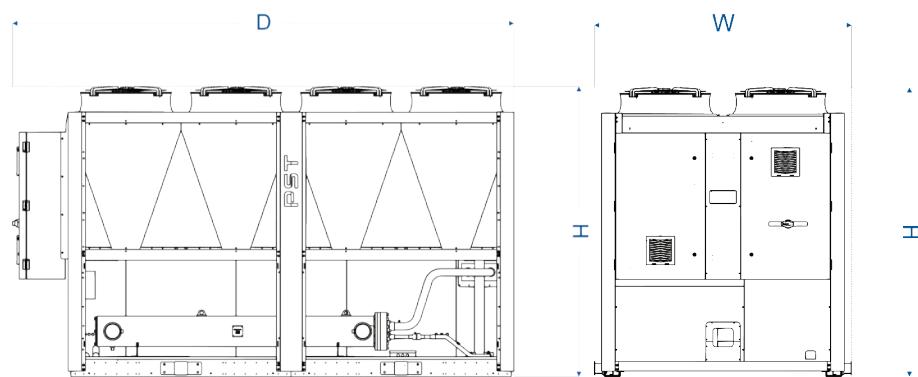


Model PNP - i (SHE)

		215	235	250	285	320	360	400	440	480							
Cooling capacity	(1) kW	482	518	574	644	736	809	904	1032	1200							
Cooling capacity	(1) TR	137	147	163	183	209	230	257	293	341							
Total absorbed power	(2) kW	151.3	162.2	174.7	196.7	221.4	248.4	278.9	319.3	364.5							
EER	(2) -	3.19	3.19	3.29	3.27	3.32	3.26	3.24	3.23	3.29							
Max external air temperature	°C	46	44	47	47	48	48	48	47	46							
EXCHANGERS																	
Evaporator pressure drops	kPa	42	28	44	27	38	34	34	44	49							
Water flow	m ³ /h	82.7	88.9	98.5	110.5	126.3	138.9	155.2	177.1	205.9							
GENERAL DATA																	
Refrigerant	-	R134A															
Circuits / Compressors	N°	2/(1+i)		2/2i													
Capacity control	%	12.5 ~ 100															
Power supply	V/Ph/Hz	400 ± 10% / 3+N-PE / 50															
Protection class	-	IP54															
NOISE LEVEL																	
Noise pressure	dB(A)	62	62	63	63	63	63	64	66	67							
Noise power	dB(A)	94	94	95	96	96	96	97	99	100							
SIZE AND WEIGHT																	
Depth	mm	5490	5490	6490	7490	8490	9490	10490	11490	11490							
Width	mm	2194	2194	2194	2194	2194	2194	2194	2194	2194							
Height	mm	2670	2670	2670	2670	2670	2670	2670	2670	2670							
Weight	kg	5698	5943	6003	6250	6503	6755	7008	7631	8253							

(1) External ambient temperature: 35°C; evaporator IN/OUT: 7/12°C

(2) Sound pressure at 10 m: average value obtained in free field on a reflective surface at a distance of 10 m from the side of the condenser coils and at a height of 1.6 m from the unit support base. Values with tolerance ± 2 dB. The sound levels refer to operation of the unit under full load in nominal conditions and with circulation pump.

or higher efficiency versions may differ. Versions refer to base chillers with no options fitted. (NB: dimensions for lower noise and/or higher efficiency versions may differ.)

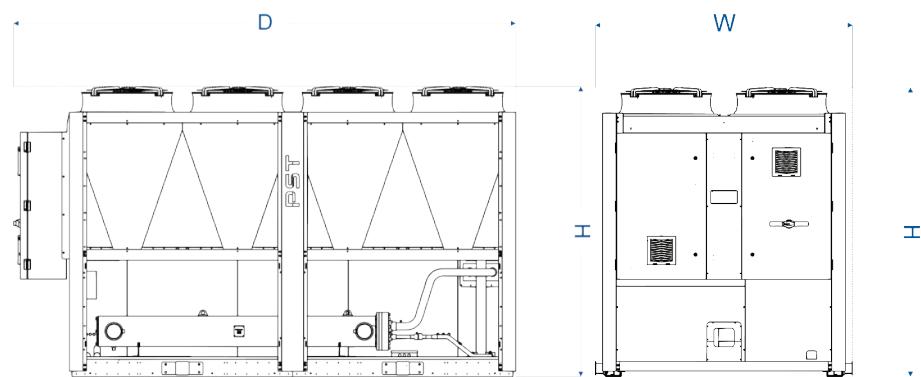



PROCESS COOLING
SOLUTIONS



AIR CONDITIONING
SYSTEMS

Pars Sanat Tahvieg co.

NEPTUNE TECH

- Water-cooled water chillers and condenserless units featuring hermetic scroll compressors.
- Cooling capacity 189-570 kW



Benefits



- Up to 6 compressors offer high efficiency and reliability
- High energy efficiency levels, especially at partial loads
- Extremely compact, even passes through a domestic door
- Operates with water outlet temperatures from 0°C to 25°C
- Unloading function allowing operation even in extreme conditions
- Self Adapting Control (SAC) with dynamic set point, for increased precision with low thermal inertias
- Robust design with high quality components from renowned suppliers, fruit of PST's industrial background
- Reduced noise levels, thanks also to the availability of two differing acoustic versions
- Flexibility of use, sized for operation with either tower or well
- Energy efficient total heat recovery and desuperheater options
- Easy installation and access to all components
- Allows both inlet and outlet water control, with a PID control
- Generous ambient limits (-10°C to +45°C)
- Easy to use intuitive controller with dual icon display

Main options

- Noise reducing compressor housing
- Modulating condensing pressure control valves
- Antivibration dampers
- Soft starter
- Desuperheater (20% heat recovery)
- Total heat recovery (100% heat recovery only chiller)
- Antifreeze heater for exchangers;
- Remote user interface;
- RS485 MODBUS interface for connection to supervisor systems
- WEB300D remote supervision, allowing local or remote monitoring via web server or GPRS
- Matching cooling towers or dry coolers available on request
- Remote condensers for integration with ME units available on request

Standard Features

- 2 to 6 hermetic scroll compressors, positioned in parallel in one or two circuits
- Shell & tube evaporator and condenser
- Shut-off valve and solenoid valve on the liquid line
- Extensive inspections and tests performed on all units
- Factory charged with non-freezing oil and refrigerant
- IP54 electrical protection rating
- Environmentally friendly refrigerant R410A with zero ozone depletion potential
- All the scroll compressors are equipped with crankcase heaters as standard
- All the units are delivered with a phase monitor which provides protection against phase loss and phase reversal

Versions:

- **NET** - Cooling only
- **NET Silent** - Low noise
- **NET / ME** - Condenserless unit combinable with remote condenser

Water-cooled chillers stand out in the HVAC industry as a technologically advanced solution for maintaining optimal temperature control in commercial, industrial, and residential settings. These chillers operate by leveraging water's inherent thermal conductivity properties to efficiently transfer heat away from the environment. The system typically comprises a compressor, evaporator, condenser, and expansion devices which work in harmony to achieve efficient heat exchange. Water-cooled chillers are particularly favored for applications requiring high cooling capacities.

One of the technical advantages of water-cooled chillers is their ability to maintain a consistently low condenser water temperature, which directly translates to enhanced energy efficiency. This is made possible by their closed-circuit design, which minimizes water consumption while maximizing heat transfer efficiency. Furthermore, these chillers are often equipped with advanced control systems that enable precise temperature adjustments, real-time monitoring, and diagnostics to ensure optimal performance and minimal energy wastage.


Model NET

		060	070	080	090	100	110	120	130	140	150	160	170	180							
Cooling capacity	kW	189	215	239	264	290	338	382	404	429	449.5	478	519.5	570							
Cooling capacity	TR	53.7	61.1	68	75	82.5	96.1	108.6	115	122	127.8	135.9	147.7	162							
Total absorbed power	kW	41	46.3	52.6	56.6	63.6	72.6	82	87.3	92.6	98.7	105.2	114	123							
EER	-	4.61	4.64	4.54	4.66	4.56	4.66	4.66	4.63	4.63	4.55	4.54	4.55	4.63							
EXCHANGERS																					
Evaporator pressure drops	kPa	37	36	38	44	53	27	45	50	52	28	26	32	48							
Water flow	m ³ /h	32.44	36.9	41.02	45.32	49.78	58.02	65.57	69.35	73.64	77.16	82.05	89.17	97.84							
GENERAL DATA																					
Refrigerant	-	R410A																			
Circuits / Compressors	N°	1 / 2			2 / 4							2 / 5	2 / 6								
Power supply	V/Ph/Hz	400 ± 10% / 3 - PE / 50																			
Protection class	-	IP54																			
NOISE LEVEL																					
Noise pressure	dB(A)	57	57	58	58.5	58.5	59.5	60	60	60	60.5	61	61.5	62							
Noise power	dB(A)	51	51	52	52.5	52.5	53.5	54	54	54	54.5	55	55.5	56							
SIZE AND WEIGHT																					
Depth	mm	2900	2900	2900	2900	2900	2900	2900	2900	2900	2900	3400	3400	3700							
Width	mm	1300	1300	1300	1300	1300	1300	1300	1300	1300	1300	1300	1300	1300							
Height	mm	1800	1800	1800	1800	1800	1800	1800	1800	1800	1800	1800	1800	1800							
Weight	kg	936	968	1000	1192	1192	1470	1657	1669	1806	1818	1880	2023	2266							

(1) Evaporator IN/OUT: 12/7°C; condenser IN/OUT: 35/30°C;

(2) Sound pressure at 10 m: average value obtained in free field on a reflective surface at a distance of 10 m from the side of the condenser coils and at a height of 1.6 m from the unit support base. Values with tolerance ± 2 dB. The sound levels refer to operation of the unit under full load in nominal conditions and with circulation pump.

The listed noise levels, weights and dimensions refer to base chillers with no options fitted. (NB: dimensions for lower noise and/or higher efficiency versions may differ.)

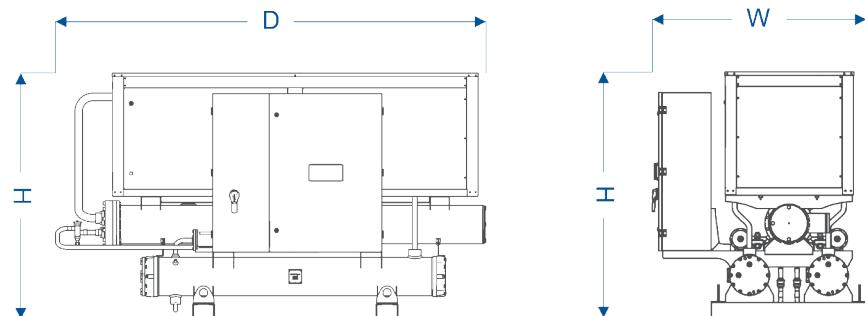



PROCESS COOLING
SOLUTIONS



AIR CONDITIONING
SYSTEMS

Pars Sanat Tahvieg co.

AQUARIUS PLUS

- High efficiency water cooled chillers and evaporating units with screw compressors and R134a refrigerant gas.
- Cooling capacity **343 - 1528 kW**



Benefits

- 21 base models that perfectly match each specific system requirements
- High energy efficiency both at full load and at partial load
- Stepless cooling capacity regulation with self-adaptive control
- High precision and adaptability in cooling capacity regulation
- Compressors minimum partialization step 25%
- Heat exchangers with low water side pressure drops in order to save pumping costs
- Low sound levels, thanks also to the availability of two different acoustic versions
- Easy access to all components
- Fully bundled heat recovery solutions
- Condenser outlet water temperature up to 60°C



Main options

- Partial or total heat recovery
- Compressors acoustical enclosure (super silent acoustic configuration)
- Shut-off valves on suction line
- Soft starter device allows a reduction in start-up current reducing the mechanical stress for compressors
- Capacitors for compressors
- Condensing control kit (with servo-driven modulating valves or pressure control valves)
- Flanges kit on evaporator
- Flanges kit or Victaulic kit on condenser and total heat recovery
- Anti-vibration dampers kit
- Remote control with LCD display VGIP
- xWEB300D supervisor kit
- Cooling tower or dry cooler available on request
- Remote condenser available on request for condenserless

Standard Features

- Environmentally friendly refrigerant R134a with zero ozone depletion potential
- High efficiency screw compressors with stepless regulation optimized for R134a refrigerant gas
- Automatic circuit breakers for compressors
- Compressor crankcase heaters
- Check valve and shut-off valve on discharge line
- Electronic expansion valves
- Single pass shell & tubes heat exchangers optimized for R134a refrigerant gas
- Electrical panel with numbered wires, forced ventilation and IP54 protection class
- Phase monitor which provides protection against phase loss and phase reversal
- Microprocessor electronic control DRIVE with high computing capacity and user friendly interface, suitable for connection with supervisor system
- RS485 interface for connection to ModBus supervisor systems
- Ethernet connection featuring pre-programmed HTML supervision pages, allowing local or internet based visualization and modification of the operating parameters.

Acoustic configurations

- **Basic acoustic configuration:** compressors directly accessible.
- **Super silent acoustic configuration:** this configuration is optimised for very low noise operation: compressors are housed in a metal compartment insulated with a sound absorbing layer of open-cell expanded polyurethane and a sheet of sound deadening material (noise reduction - 6 db(A) in comparison with basic).

Versions:

- **CH** - Cooling only version
- **ME** - Condenserless version
- **LWT** - Low Water Temperature (down to -8°C)

The Aquarius Plus water cooled screw chillers are the best solution for commercial and industrial applications when requirements are reliability and performances. They are designed to meet market requirements in terms of versatility and energy efficiency. Stepless cooling capacity regulation, electronic expansion valves and high efficiency heat exchangers with integrated heat recovery systems, contributes to obtain high performance both at full load and at partial load with exceptional ESEER value.



Model AQP

	1402	1502	1602	1702	1802	2002	2202	2352	2502	2652	2802
Cooling capacity	kW	343.4	372.7	412	441	476	513	562	587	620	656
Cooling capacity	TR	97.64	106	117.15	125.4	135.34	145.86	159.8	166.9	176.3	186.52
Total absorbed power	kW	70	77.4	85.2	91.1	97.2	103.6	110.4	117.1	124.2	132.5
EER	-	4.91	4.82	4.84	4.84	4.90	4.95	5.09	5.01	5	4.95
EXCHANGERS											
Evaporator pressure drops	kPa	31	37	32	44	41	47	43	43	37	24
Water flow	m ³ /h	58.94	63.97	70.72	75.7	81.71	88.06	96.47	100.76	106.42	112.6
GENERAL DATA											
Refrigerant	-	R134A									
Circuits / Compressors	N°	2 / 2									
Capacity control	%	12.5 ~ 100									
Power supply	V/Ph/Hz	400 ± 10% / 3 - PE / 50									
Protection class	-	IP54									
NOISE LEVEL											
Noise pressure	dB(A)	68	68	69	69	69	70	70	70	70	70.5
Noise power	dB(A)	62	62	63	63	63	64	64	64	64	64.5
SIZE AND WEIGHT											
Depth	mm	4150	4150	4300	4300	4300	4300	4300	4300	4300	4300
Width	mm	1460	1460	1460	1460	1460	1460	1460	1460	1460	1390
Height	mm	1640	1640	1640	1725	1725	1725	1725	1770	1770	2132
Weight	kg	2110	2489	2918	2928	3018	3028	3048	3204	3380	3480

(1) Evaporator IN/OUT: 12/7°C; condenser IN/OUT : 35/30°C;

(2) Sound pressure at 10 m: average value obtained in free field on a reflective surface at a distance of 10 m from the side of the condenser coils and at a height of 1.6 m from the unit support base. Values with tolerance ± 2 dB. The sound levels refer to operation of the unit under full load in nominal conditions and with circulation pump.

The listed noise levels, weights and dimensions refer to base chillers with no options fitted.(NB:dimensions for lower noise and / or higher efficiency versions may differ.)

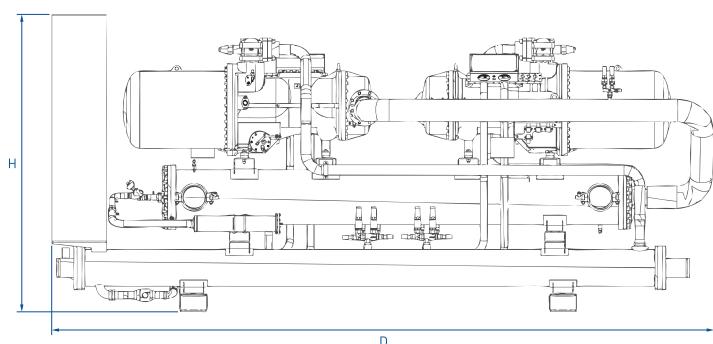


Model AQP

		3002	3202	3402	3602	3902	4202	4502	4802	5602	6402
Cooling capacity	kW	761	838	895	970	1030	1100	1167	1272	1362	1528
Cooling capacity	TR	216.4	238.27	254.48	275.8	292.86	312.8	331.8	361.7	387.26	434.46
Total absorbed power	kW	153.2	165.4	176.4	188.4	201.2	215.2	229.8	242.8	281.2	300.4
EER	-	4.97	5.07	5.07	5.15	5.12	5.11	5.08	5.24	4.84	5.09
EXCHANGERS											
Evaporator pressure drops	kPa	51	37	45	42	47	38	41	44	49	41
Water flow	m ³ /h	130.63	143.84	153.63	166.5	176.8	188.81	200.32	218.34	233.79	262.28
GENERAL DATA											
Refrigerant	-	R134A									
Circuits / Compressors	N°	2 / 2									
Capacity control	%	12.5 ~ 100									
Power supply	V/Ph/Hz	400 ± 10% / 3 - PE / 50									
Protection class	-	IP54									
NOISE LEVEL											
Noise pressure	dB(A)	70.5	71	71	71	71.5	72	72	72.5	72.5	73
Noise power	dB(A)	64.5	65	65	65	65.5	66	66	66.5	66.5	67
SIZE AND WEIGHT											
Depth	mm	4920	4920	4920	4920	4920	4920	4920	4920	4970	4970
Width	mm	1390	1390	1390	1390	1390	1390	1390	1390	1390	1390
Height	mm	2132	2132	2165	2165	2278	2278	2287	2287	2287	2287
Weight	kg	3870	4420	4440	4645	4795	4945	5010	5710	5945	6265

(1) Evaporator IN/OUT: 12/7°C; condenser IN/OUT : 35/30°C;

(2) Sound pressure at 10 m: average value obtained in free field on a reflective surface at a distance of 10 m from the side of the condenser coils and at a height of 1.6 m from the unit support base. Values with tolerance ± 2 dB. The sound levels refer to operation of the unit under full load in nominal conditions and with circulation pump.

The listed noise levels, weights and dimensions refer to base chillers with no options fitted.(NB:dimensions for lower noise and / or higher efficiency versions may differ.)

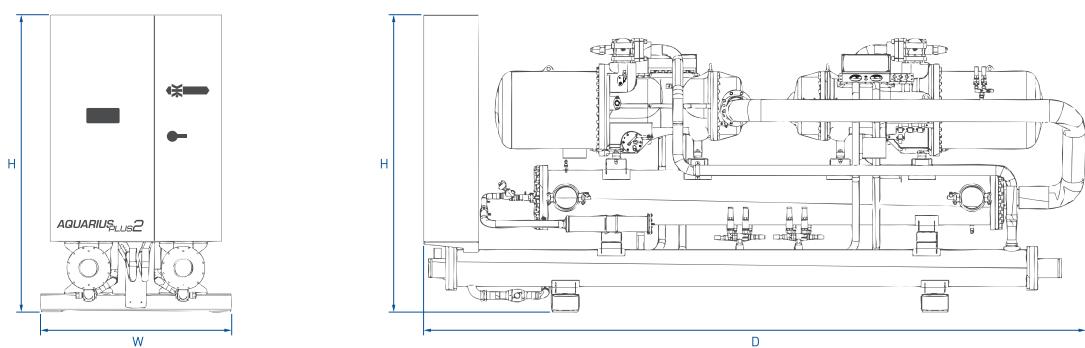

FREE COOLING CHILLERS

Pars Sanat Tahvиеh co.

Free Cooling Chillers: An Efficient Solution for Year-Round Cooling

Our Free Cooling Chillers are designed to maximize energy efficiency and reduce operational costs by leveraging natural cooling when outdoor temperatures are low. Explore how these innovative chillers can benefit your operations.

Free Cooling Chillers are advanced cooling systems that utilize cool ambient air to provide cooling without relying solely on the compressor. When the outdoor temperature is sufficiently low, these chillers can switch to a free cooling mode, using outside air to cool the circulating water directly. This significantly reduces energy consumption and operational costs, especially in cooler climates or during the colder months of the year.

What are Free Cooling Chillers?

Benefits of Free Cooling Chillers

1. Energy Efficiency:

- By utilizing natural cooling, Free Cooling Chillers can dramatically lower energy usage. This is particularly beneficial during periods when outdoor temperatures drop, allowing the system to operate without the need for mechanical cooling.

2. Cost Savings:

- Reduced energy consumption leads to lower electricity bills and operational costs. Over time, the savings on energy expenses can be substantial, making Free Cooling Chillers a cost-effective solution for many businesses.

3. Environmental Impact:

- Lower energy usage translates to reduced greenhouse gas emissions, making Free Cooling Chillers an environmentally friendly option. This helps organizations meet sustainability goals and reduce their carbon footprint.

4. Extended Equipment Life:

- We source components from reputable suppliers who meet international safety standards, ensuring the reliability and safety of our HVAC systems.

Applications of Free Cooling Chillers

Data Centers:

- Data centers require constant and reliable cooling to prevent overheating of servers and other critical equipment. Free Cooling Chillers provide an efficient way to maintain optimal temperatures, even during colder months, reducing energy costs significantly.

Industrial Processes:

- Electrical Safety Tests:** We conduct tests to ensure that all electrical components and connections are safe and meet regulatory standards.

Commercial Buildings:

- Large commercial buildings, such as office complexes, shopping malls, and hospitals, can benefit from Free Cooling Chillers by reducing their energy consumption for air conditioning. This is particularly useful during the transitional seasons when outdoor temperatures are moderate.

Residential Complexes:

- In regions with cooler climates, residential complexes can utilize Free Cooling Chillers to provide efficient cooling for the inhabitants, ensuring comfort while keeping energy bills low.

How Free Cooling Chillers Work

1. Initial :

- During warmer periods, the chiller operates in standard mode, using the compressor to cool the circulating water.

2. Free Cooling Mode:

- When the outdoor temperature drops below a certain threshold, the chiller switches to free cooling mode. In this mode, the cool outdoor air is used to directly cool the circulating water through a heat exchanger.

3. Automatic Switching:

- The system is designed to automatically switch between mechanical cooling and free cooling based on the outdoor temperature, ensuring optimal energy efficiency at all times.



PROCESS COOLING
SOLUTIONS

Pars Sanat Tahvieg co.



AIR CONDITIONING
SYSTEMS

PHOENIX FC

- Cooling capacity **300-942 kW**



Model PNP - FC

140 160 180 220 250 280 320 360 420


FREE-COOLING OFF										
Cooling capacity	(1) kW	300	365	410	486	542	604	728	830	942
Cooling capacity	(1) TR	85	104	117	138	154	172	207	236	268
Total absorbed power	(2) kW	97	117	135	156	171	197	230	261	312
EER	(2) -	3.1	3.12	3.03	3.1	3.16	3.06	3.17	3.18	3.01
Max external air temperature	°C	51	50	48	49	50	48	50	48	46
FREE-COOLING ON 100%										
Free Cooling capacity	(1) kW	301	364	410	481	541	606	730	832	941
Total Free Cooling Temperature (2)	°C	-0.4	-2.2	-4.5	0	-3.3	-4.5	-2.9	-5.5	-1.2
EER	(2) -	23.1	27.3	30.8	23.9	26.9	30.1	27	30.8	27.9
EXCHANGERS										
Evaporator pressure drops	kPa	35	33	43	42	31	37	49	41	38
Water flow	m ³ /h	56	67.8	76.4	90.6	101	112.6	135.7	154.7	175.6
GENERAL DATA										
Refrigerant	-	R134A								
Circuits / Compressors	N°	2/2								
Capacity control	%	12.5 ~ 100								
Power supply	V/Ph/Hz	400 ± 10% / 3+N-PE / 50								
Protection class	-	IP54								
NOISE LEVEL										
Noise pressure	(3) dB(A)	68	68	68	69	69	70	70	70	70
Noise power	dB(A)	100	100	100	101	101	102	102	102	103
SIZE AND WEIGHT										
Depth	mm	5121	5121	5121	6761	6761	6761	8361	10161	10161
Width	mm	2190	2190	2190	2190	2190	2190	2190	2190	2190
Height	mm	2660	2660	2660	2660	2660	2660	2660	2660	2660
Weight	kg	4058	5089	5266	6370	6531	6723	8770	9297	10607

(1) External ambient temperature: 35°C; evaporator IN/OUT: 7/12°C

(2) Fluid Type : Water – Ethylene glycol 30 %

(3) Sound pressure at 10 m: average value obtained in free field on a reflective surface at a distance of 10 m from the side of the condenser coils and at a height of 1.6 m from the unit support base. Values with tolerance ± 2 Db. The sound levels refer to operation of the unit under full load in nominal conditions and with circulation pump.

The listed noise levels, weights and dimensions refer to base chillers with no options fitted.(NB:dimensions for lower noise and/or higher efficiency versions may differ.)

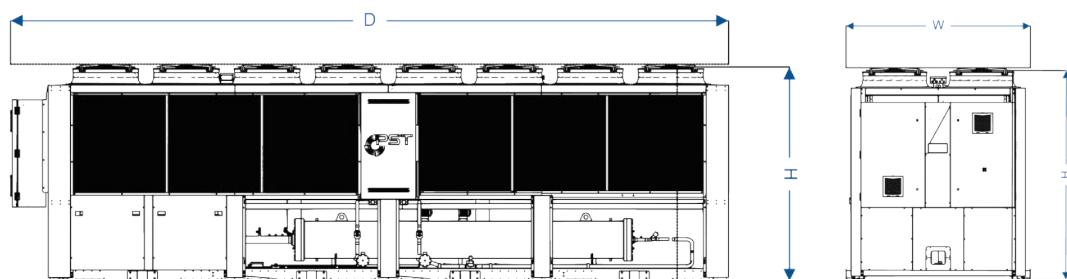

ROOFTOP UNIT

Pars Sanat Tahvieg co.

Rooftop Units: Efficient and Versatile HVAC Solutions

Our RTUs are designed to provide reliable and efficient heating, ventilation, and air conditioning (HVAC) solutions for a variety of applications. Explore the features, benefits, and applications of our high-quality rooftop units.

Rooftop Units (RTUs) are self-contained HVAC systems that are typically installed on the roof of a building. These units are designed to provide heating, cooling, and ventilation from a single, compact system, making them ideal for commercial and industrial applications. RTUs are engineered for easy installation, maintenance, and operation, ensuring consistent performance and comfort.

What are Rooftop Units?

Benefits of Our Rooftop Units

1. Energy Efficiency:

- Our RTUs are designed with advanced technology to maximize energy efficiency, helping to reduce operational costs and environmental impact.

2. Ease of Installation:

- The all-in-one design of our RTUs simplifies the installation process, saving time and labor costs. They can be quickly installed on the roof without the need for extensive ductwork or indoor space.

3. Space-Saving Design:

- By placing the HVAC system on the roof, our RTUs free up valuable indoor space that can be used for other purposes.

4. Reliability and Durability:

- Built with high-quality materials and components, our RTUs are designed to withstand harsh weather conditions and provide reliable performance year-round.

5. Versatility:

- Our RTUs can be configured to meet the specific needs of different applications, including variable air volume (VAV) systems, constant air volume (CAV) systems, and more.

6. Advanced Controls:

- Equipped with modern control systems, our RTUs offer precise temperature and humidity control, as well as integration with building management systems (BMS).

Types of Rooftop Units

Standard Rooftop Units

Features:

- ✓ Integrated heat recovery systems to capture and reuse waste heat
- ✓ Improved energy efficiency and reduced operational costs
- ✓ Versatile configurations for various building types

Application:

- ✓ Industrial facilities
- ✓ Data centers
- ✓ Large office complexes

High-Efficiency Rooftop

Standard Rooftop Units

Features:

- ✓ Enhanced energy efficiency with advanced compressors and heat exchangers
- ✓ Variable speed fans for better air distribution and energy savings
- ✓ Ideal for buildings with high energy efficiency requirements

Application:

- ✓ Schools
- ✓ Hospitals
- ✓ Shopping malls

Heat Recovery Rooftop Units

Standard Rooftop Units

Features:

- ✓ Integrated heat recovery systems to capture and reuse waste heat
- ✓ Improved energy efficiency and reduced operational costs
- ✓ Suitable for environments where both heating and cooling are required simultaneously

Application:

- ✓ Industrial facilities
- ✓ Data centers
- ✓ Large office complexes

Packaged Rooftop Units

Standard Rooftop Units

Features:

- ✓ Complete HVAC system in a single unit
- ✓ Simplified installation and maintenance
- ✓ Versatile configurations for various building types

Application:

- ✓ Warehouses
- ✓ Manufacturing plants
- ✓ Commercial complexes

Applications of Rooftop Units

Commercial Buildings:

- Our RTUs provide efficient heating and cooling for office buildings, retail stores, restaurants, and other commercial spaces, ensuring a comfortable environment for employees and customers.

Industrial Facilities:

- In industrial settings, our RTUs offer robust and reliable climate control, maintaining optimal temperatures for manufacturing processes and worker comfort.

Educational Institutions:

- Schools and universities benefit from our energy-efficient RTUs, which help maintain a conducive learning environment while reducing energy costs.

Healthcare Facilities:

- Hospitals and clinics require precise temperature and humidity control, and our RTUs deliver reliable performance to meet these stringent requirements.



PROCESS COOLING
SOLUTIONS

Pars Sanat Tahvieg co.



AIR CONDITIONING
SYSTEMS

**POLARIS
TECH**

Cooling capacity **36-112 kW**



- Innovative Technology:** Our RTUs incorporate the latest HVAC technologies to deliver superior performance and energy efficiency.
- Custom Solutions:** We offer a variety of models and configurations to meet the unique needs of different applications and environments.
- Expert Support:** Our team of experts is available to provide consultation, installation, and maintenance services, ensuring your RTUs operate at peak performance.

Why Choose PST Rooftop Units?

Model Polaris


		201	181	261	301	401
Cooling capacity	(1) kW	36	52.6	77	90	112
Cooling capacity	(1) TR	10.2	15	21.9	25.6	31.8
Compressor power input	kW	11.7	16.9	25.2	29.4	38.3
EER	(2) -	3.08	3.11	3.06	3.06	2.92
Max external air temperature	°C	51	49	50	49	46
Supply Fan						
Air flow rate	m³/h	6000	9000	12000	15000	18000
Nominal External Static Pressure	Pa	250	250	250	250	250
GENERAL DATA						
Refrigerant	-			R410A		
Circuits / Compressors	N°			1/2		
Power supply	V/Ph/Hz			400 ± 10% / 3+N- PE / 50		
Protection class	-			IP54		
NOISE LEVEL						
Noise pressure	dB(A)	66	66	66	67	67
Noise power	dB(A)	90	91	91	94	94
SIZE AND WEIGHT						
Depth	mm	3100	3230	3710	3810	4000
Width	mm	1800	1800	2100	2100	2100
Height	mm	1750	1750	2200	2200	2200
Weight	kg	360	380	540	650	670

(1) Coolig: Outdoor 35°C 50% R.H. / Indoor 27°C 47% R.H. / Mix 30%

(2) ESP for standard configuration (optional accessories not included/calculated)

(3) Sound power on the basis of measurements made in compliance with ISO 3744.

(4) Unit in standard configuration/execution, without optional accessories

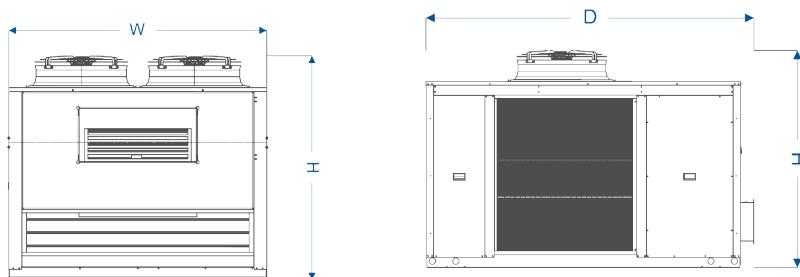

AIR HANDLING UNITS

Pars Sanat Tahvieg co.

Air Handling Units (AHUs): Comprehensive Climate Control Solutions

Our AHUs are engineered to provide precise and efficient climate control for a wide range of applications, ensuring optimal air quality and comfort in residential, commercial, and industrial environments. Explore the features, benefits, and applications of our high-quality Air Handling Units.

Air Handling Units (AHUs) are essential components of HVAC systems that condition and circulate air within buildings. They typically include components such as fans, filters, heating/cooling coils, humidifiers, and dampers. AHUs are designed to control temperature, humidity, and air quality, making them crucial for maintaining a comfortable and healthy indoor environment.

What are Air Handling Units?

Benefits of Our Air Handling Units

1. Enhanced Air Quality:

- Our AHUs are equipped with advanced filtration systems that remove dust, pollen, and other airborne contaminants, ensuring clean and healthy indoor air.

2. Energy Efficiency:

- Designed to optimize energy use, our AHUs help reduce operational costs while maintaining consistent performance and comfort levels.

3. Customizable Solutions:

- We offer a range of AHU models with customizable features to meet the specific requirements of different environments and applications.

4. Reliable Performance:

- Built with high-quality materials and components, our AHUs deliver reliable and long-lasting performance, minimizing downtime and maintenance costs.

5. Quiet Operation:

- Engineered for low noise levels, our AHUs ensure a quiet and comfortable indoor environment, ideal for both residential and commercial spaces.

Types of Air Handling Units

Modular Air Handling Units

Features:

- Flexible design for easy customization
- High-efficiency components for energy savings
- Suitable for a wide range of applications

Application:

- Office buildings
- Shopping malls
- Hospitals

Compact Air Handling Units

Standard Rooftop Units

Features:

- Space-saving design for limited spaces
- Quiet and efficient operation
- Ideal for smaller commercial and residential applications

Application:

- Apartments
- Small offices
- Retail stores

Rooftop Air Handling Units

Rooftop Air Handling Units

Features:

- Designed for outdoor installation on rooftops
- Weather-resistant construction
- High capacity for large commercial and industrial buildings

Application:

- Factories
- Warehouses
- Large office complexes

Packaged Rooftop Units

Hygienic Air Handling Units

Features:

- Specialized design for environments with strict hygiene requirements
- Easy to clean and maintain
- Advanced filtration and sterilization options

Application:

- Hospitals
- Clean rooms
- Pharmaceutical facilities

Applications of Air Handling Units

Residential:

- Our AHUs ensure optimal air quality and comfort for homes and apartments, providing efficient heating, cooling, and ventilation.

Commercial:

- Ideal for office buildings, hotels, shopping centers, and restaurants, our AHUs offer reliable climate control solutions that enhance comfort and productivity.

Industrial:

- In industrial settings, our AHUs provide robust and efficient climate control for factories, warehouses, and other large facilities, ensuring a safe and comfortable working environment.

Healthcare:

- Our AHUs are perfect for healthcare facilities such as hospitals and clinics, where precise temperature, humidity control, and air quality are critical for patient care and safety.



PROCESS COOLING
SOLUTIONS

Pars Sanat Tahvieg co.



AIR CONDITIONING
SYSTEMS


AIR HANDING UNITS

Cooling capacity 50-250 kW



PST AHU	width (mm)							
	1020	1325	1630	1935	2220	2670	3300	4000
Height (mm)	1045	4000	5100-6000					
	1225		6800-7600					
	1555		8500-1100	11900-4500	13500-17800			
	1845				18700-21200			
	2145				22000-25500			
	2230					26500-30500	31500-37500	38000-47000
	2850						47500-63000	63500-68000

* max. velocity on coils is 2.5 m/s
 * Airflow unit is m³/h
 * AHUs with larger sizes can be provided

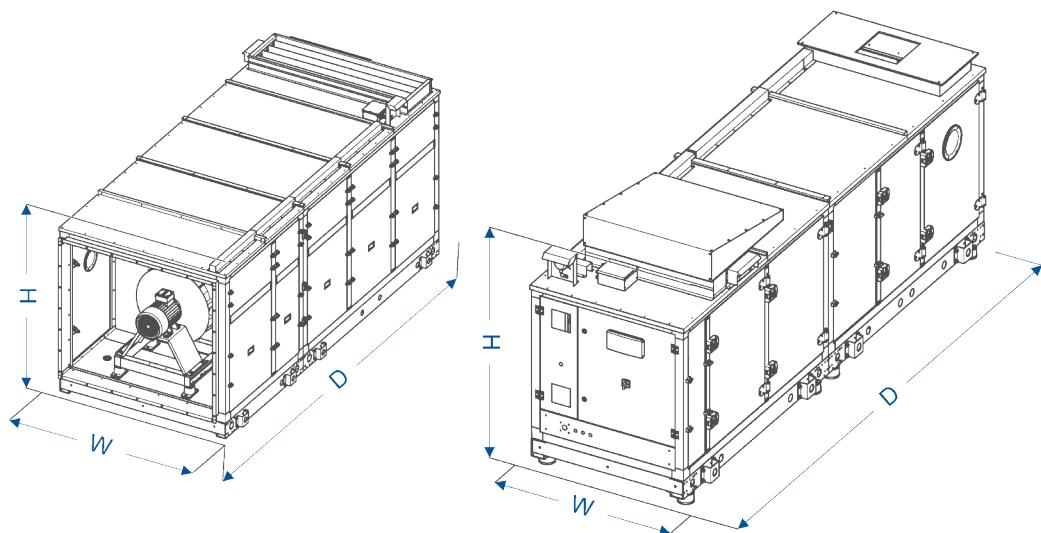

HYDRONIC TERMINALS

Pars Sanat Tahvieg co.

Fan Coil Units: Comfort and Efficiency for Every Environment

Our Fan Coil Units (FCUs) are designed to provide efficient and reliable heating and cooling solutions for a variety of applications, ensuring comfort and energy efficiency in residential, commercial, and industrial environments. Discover the features, benefits, and applications of our high-quality Fan Coil Units.

Fan Coil Units are versatile HVAC devices used to regulate the temperature in individual rooms or spaces. They consist of a fan and a heat exchanger (coil) and can be connected to a central chiller or boiler system. FCUs can deliver both heating and cooling, making them a flexible and efficient choice for temperature control.

What are Fan Coil Units?

Benefits of Our Fan Coil Units

1. Energy Efficiency:

- Our FCUs are designed to maximize energy efficiency, helping to reduce operational costs while maintaining optimal comfort levels.

2. Quiet Operation:

- Engineered for low noise levels, our FCUs ensure a quiet and comfortable environment, making them ideal for use in residential and office spaces.

3. Compact Design:

- With their sleek and compact design, our FCUs can be easily installed in various settings without taking up too much space or disrupting the aesthetic of the room.

4. Easy Installation and Maintenance:

- Our FCUs are designed for easy installation and maintenance, ensuring hassle-free operation and long-term reliability.

5. Advanced Control Options:

- Equipped with advanced control systems, our FCUs offer precise temperature control and integration with smart home or building management systems.

Types of Fan Coil Units

Ceiling Mounted Fan Coil Units

Features:

- Space-saving design for ceiling installation
- Quiet and efficient operation
- Ideal for offices, hotels, and commercial spaces

Application:

- Office buildings
- Hotels
- Conference rooms

Wall Mounted Fan Coil Units

Features:

- Easy wall-mounted installation
- Sleek and modern design
- Perfect for residential and commercial use

Application:

- Apartments
- Houses
- Retail stores

Floor Mounted Fan Coil Units

Features:

- Sturdy and reliable design for floor installation
- Suitable for spaces with limited wall or ceiling space
- Excellent heating and cooling performance

Application:

- Hospitals
- Schools
- Industrial facilities

Concealed Fan Coil Units

Features:

- Hidden installation within ceilings or walls
- Discreet and unobtrusive
- Ideal for high-end residential and commercial properties

Application:

- Luxury apartments
- Upscale hotels
- Executive offices

Applications of Fan Coil Units

Residential:

- Our FCUs provide comfortable and efficient heating and cooling for homes, apartments, and villas, ensuring a pleasant living environment throughout the year.

Commercial:

- Designed to meet the demands of commercial spaces, our FCUs are ideal for offices, retail stores, hotels, and restaurants, providing consistent and reliable temperature control.

Industrial:

- In industrial settings, our FCUs offer robust and efficient heating and cooling solutions, suitable for factories, warehouses, and other industrial facilities.

Healthcare:

- Our FCUs are perfect for healthcare facilities such as hospitals and clinics, where precise temperature control and quiet operation are critical for patient comfort and care.



PROCESS COOLING
SOLUTIONS

Pars Sanat Tahvieg co.



AIR CONDITIONING
SYSTEMS

FAN COIL UNITS

Air Flow : 510-4400 m³ / h (12 - 120 pa)



PST fan coils:

Model		51	68	102	136	170	204	
AIR flow	max	m ³ /h	510	680	1020	1360	1700	2040
	med		390	510	770	1020	1280	1530
	min		260	340	510	680	850	1020
Total cooling capacity	max	W	2700	3600	5400	7200	9000	10800
	med		2242	2989	4483	5978	7472	8967
	min		1744	2325	3487	4649	5812	6974
Sensible cooling capacity	max		2052	2736	4103	5471	6839	8207
	med		1771	2362	3541	4722	5903	7084
	min		1430	1907	2860	3813	4765	5718
Heating capacity	max		4050	5400	8100	10800	13500	16200
	med		3197	4262	6393	8524	10655	12786
	min		2511	3349	5024	6697	8372	10046
pressure drop		kPa	15	18	28	30	22	30
Sound power level		dB	39	41	45	46	48	50
Dimension	A	mm	494	494	494	494	494	494
	B	mm	234	234	234	234	234	234
	C	mm	658	808	1008	1358	1508	1658
	D	mm	610	760	960	1310	1460	1610
	E	mm	633	783	983	1333	1483	1633
Water flowrate		m ³ /h	0.46	0.62	0.93	1.23	1.54	1.85
connection size		in	3/4	3/4	3/4	3/4	3/4	3/4

PST fan coils:


EUE fan coils:

			430	630	730	930
Air flow	max	m3/h	485	760	925	1500
	med.	m3/h	335	590	735	1210
	min.	m3/h	265	415	535	830
Total cooling capacity	max	W	2870	4090	5110	6740
	med.		2140	3370	4290	5870
	min.		1730	2540	3340	5870
Sensible cooling capacity	max	W	2190	3200	3950	5550
	med.		1600	2590	3270	4730
	min.		1280	1910	2500	3490
Heating capacity	max	W	27.2	19.8	34.2	24.6
	med.		16.2	14.1	25.1	19.3
	min.		11.2	8.6	16.2	11.9
(Cooling mode) Pressure drop	max	kPa	3560	5090	6270	9060
	med.	kPa	2610	4130	5190	7720
	min.	kPa	2090	3070	4010	5710
(Heating mode) Pressure drop	max	kPa	23.1	16.8	29.1	2.9
	med.	kPa	13.8	12	21.3	15.4
	min.	kPa	9.5	7.3	13.8	10.1
Sound power level	max	dB(A)	47	52	56	64
	med.	dB(A)	39	46	51	58
	min.	dB(A)	33	37	42	50
Sound pressure level (*)	max	dB(A)	38	43	47	55
	med.	dB(A)	30	37	42	49
	min.	dB(A)	24	28	33	41
water flowrate		m3/h	min: 0.1 max: 0.75	min: 0.15 max: 1	min: 0.15 max: 1.5	min: 0.2 max: 2
connection size		in	3/4	3/4	3/4	3/4

EUE fan coils:

Model			430	630	730	930
Dimension	A	mm	525	525	525	525
	B	mm	234	234	234	234
	C	mm	689	904	1119	1244
	D	mm	641	856	1071	1196
	E	mm	664	879	1094	1219

Total cooling capacity at the following conditions: water inlet-outlet temperature 7-12 °C. Air temperature 19 °C (wb) / 27 °C (db). Heating capacity at the following conditions: water inlet temperature 50 °C. Air temperature 20 °C.

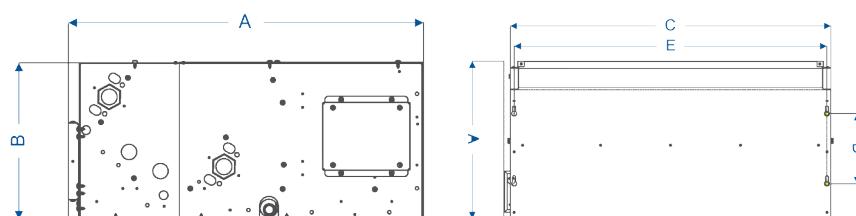

Duct fan coils:

- The following standard rating conditions are used:
 - COOLING (summer mode)
 - Entering air temperature + °27C d.b. +°19C w.b.
 - Water temperature + °7C E.W.T. + °12C L.W.T.
 - HEATING (winter mode)
 - Entering air temperature + °20C
 - Water temperature + °60C E.W.T. + °50C L.W.T.
- AVAILABLE PRESSURE: 0 Pa

MTO fan coils:

			13	23	33	43	53
Air flow	max	m3/h	1925	2510	2790	3400	4400
	med.	m3/h	1340	1550	2300	2855	3540
	min.	m3/h	995	855	1815	2265	2905
Total cooling capacity	max	Kw	6.02	8.31	9.89	12.62	16.67
	med.		4.95	6.41	8.91	11.48	14.77
	min.		4.19	4.50	7.82	10.08	13.21
Sensible cooling capacity	max	Kw	5.73	7.53	8.68	10.87	14.67
	med.		4.41	5.36	7.57	9.61	15.53
	min.		3.55	3.47	6.41	8.16	10.85
Heating capacity	max		12.33	16.44	19.10	23.85	31.42
	med.		9.73	11.92	16.80	21.21	27.14
	min.		7.91	7.75	14.27	18.06	23.64
(Cooling mode) Pressure drop	max	kPa	13.7	27.4	28.8	28.0	26.5
	med.	kPa	9.6	16.9	23.8	23.0	21.2
	min.	kPa	7.0	8.7	18.7	18.0	17.2
(Heating mode) Pressure drop	max	kPa	11.0	20.9	21.1	15.0	18.4
	med.	kPa	7.1	11.4	16.6	12.0	14.1
	min.	kPa	4.8	5.1	12.3	9.0	10.9
Sound power level	max	dB(A)	63	68	68	72	75
	med.	dB(A)	56	59	64	67	71
	min.	dB(A)	49	47	60	63	66
Sound pressure level (*)	max	dB(A)	54	59	59	63	66
	med.	dB(A)	47	50	55	58	62
	min.	dB(A)	40	38	51	54	57
water flowrate		m3/h	min: 0.766 max: 1.122	min: 0.837 max: 1.529	min: 1.447 max: 1.816	min: 1.837 max: 2.340	min: 2.447 max: 3.070
connection size		in	1	1	1	1	1

MTO fan coils:

Model			13	23	33	43	53
Dimension	A	mm	304	344	344	364	415
	B	mm	695	695	695	850	850
	C	mm	1133	1133	1133	1445	1445
	D	mm	617	617	617	771	771
	E	mm	1178	1178	1178	1490	1490

MTO fan coils:


			13+1	23+1	33+1	43+1	53+1
Air flow	max	m3/h	1835	2360	2745	3340	4330
	med.	m3/h	1315	1535	2265	2820	3505
	min.	m3/h	940	855	1795	2245	2885
Total cooling capacity	max	Kw	7.07	9.77	11.95	15.07	19.80
	med.		5.88	7.63	10.70	13.67	17.49
	min.		4.80	5.22	9.32	11.92	15.53
Sensible cooling capacity	max	Kw	6.33	8.33	9.92	12.36	16.50
	med.		4.96	6.08	8.63	10.93	14.10
	min.		3.85	3.88	7.28	9.24	12.17
Heating capacity	max		14.20	18.71	22.36	27.91	36.49
	med.		11.22	13.76	19.50	24.69	31.31
	min.		8.76	8.77	16.43	20.86	27.08
(Cooling mode) Pressure drop	max	kPa	12.4	21.4	25.8	23.0	21.2
	med.	kPa	8.8	13.5	21.0	19.0	16.8
	min.	kPa	6.0	6.7	16.3	15.0	13.5
(Heating mode) Pressure drop	max	kPa	9.5	15.2	17.7	15.0	14.0
	med.	kPa	6.1	8.6	13.7	12.0	10.6
	min.	kPa	3.9	3.7	9.9	9.0	8.0
Sound power level	max	dB(A)	63	68	68	72	75
	med.	dB(A)	56	59	64	67	71
	min.	dB(A)	49	47	60	63	66
Sound pressure level (*)	max	dB(A)	54	59	59	63	66
	med.	dB(A)	47	50	55	58	62
	min.	dB(A)	40	38	51	54	57
water flowrate		m3/h	min: 1.122 max: 0.692	min: 1.529 max: 0.888	min: 1.816 max: 1.070	min: 2.340 max: 1.391	min: 2.447 max: 1.769
connection size		in	min: 1 max: 3/4				

MTO fan coils:

Model		13+1	23+1	33+1	43+1	53+1
Dimension	A	mm	304	344	344	364
	B	mm	695	695	695	850
	C	mm	1133	1133	1133	1445
	D	mm	617	617	617	771
	E	mm	1178	1178	1178	1490

Total cooling capacity at the following conditions: water inlet-outlet temperature 7-12 °C. Air temperature 19 °C (wb) / 27 °C (db).

Heating capacity at the following conditions: water inlet temperature 50 °C. Air temperature 20 °C.

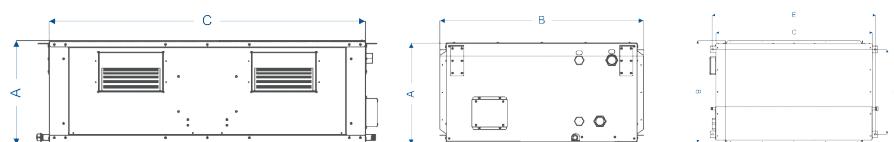



Website: www.psthvac.com | Phone: 021 26 76 37 10
Email: info@psthvac.com | Fax: 021 26 76 37 22

 Flat NO.1, NO.36, Moqaddas st, (11 West) South Shahrdari Blvd Gheysar Amin pour, Sq Saadat Abad, Tehran-Iran

 Kar Blvd., Soleman Sabahi Industrial Town, Kashan-Iran